

## VESDA VLC

VLC-500 & VLC-505

### Features:

- ▶ Absolute smoke detection
- ▶ Wide sensitivity range
- ▶ Single pipe inlet
- ▶ Five (5) status LEDs
- ▶ Referencing
- ▶ VESDAnet communication (VN)
- ▶ Clean air barrier optics protection
- ▶ Three (3) Alarm Levels
- ▶ Three (3) Programmable Relays
- ▶ Air flow monitoring
- ▶ Optional remote display and relay capability
- ▶ Simple mounting design
- ▶ AutoLearn™



### Listings / Approvals



- Class A (30 holes / 0.05% obs/m)
- Class B (36 holes / 0.09% obs/m)
- Class C (40 holes / 0.165% obs/m)

The VESDA VLC detector has been specifically designed to provide all the benefits of aspirating smoke detection, including very early warning, in single environment small areas and where space is a premium.

The VLC combines the well-proven VESDA VLP detection technology with a modified aspirator design, and incorporates them into a compact enclosure with a simplified display.

### Two variants and a remote display option

The VLC is available in two versions, one that interfaces via relays only (RO) and one that interfaces via relays and VESDAnet (VN).

The VN version is compatible with the remote Display Module, which allows the current status of the detector to be reported in the most convenient location. The remote Display Module has 7 remote relays to support any combination of signalling that may be demanded by the application. The VN version allows several detectors to be linked together on VESDAnet thereby allowing one to act as a reference detector for other VESDA detectors.

### Description

The VLC is made up of two parts: the main enclosure and the front cover.

The main enclosure houses all the key components of the detector. All non-serviceable items like the main processor board and detector chamber are mounted away from the general access area, protecting them during the installation and service process.

The front cover includes:

- ▶ 5 LEDs: Fire, Pre-Alarm/Alert, Fault, OK, Reset/Isolate
- ▶ Reset/Isolate Push Button (press to reset, press and hold to isolate)

# VESDA VLC


VLC-500 & VLC-505

### How it works

Air is continually drawn through a simple pipe network to a central detector by a high efficiency aspirator. Air entering the unit passes a flow sensor before a sample is passed through a dual-stage dust filter (the majority of air is exhausted from the detector and back-vented to the protected area). The first stage removes dust and dirt from the air sample before it enters the chamber for smoke detection. The second, ultra-fine stage provides a clean air supply to be used inside the detection chamber to form clean air barriers, which protect the optical surfaces from contamination.

The detection chamber uses a stable, highly efficient laser light source and unique sensor configuration to achieve the optimum response to a wide range of smoke types. When smoke passes through the detection chamber it creates light scatter which is detected by the very sensitive sensor circuitry.

The status of the detector, all alarms, service and fault events, are monitored and logged with time and date stamps. Status reporting can be transmitted via simple relay connections or across the advanced VESDAnet communications network (VN version only).

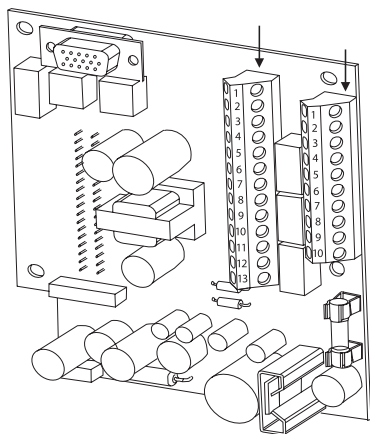


### VESDA VLC Termination Card (VN)

#### Terminal A

|                  |                  |
|------------------|------------------|
| 1 Bias (-) (GND) | 8 FIRE (C)       |
| 2 Reset (-)      | 9 PRE-ALARM (NO) |
| 3 Reset (+)      | 10 PRE-ALARM (C) |
| 4 Bias (+)       | 11 FAULT (NO)    |
| 5 LED (-) (GND)  | 12 FAULT (C)     |
| 6 LED (+)        | 13 FAULT (NC)    |
| 7 FIRE (NO)      |                  |

#### Terminal B

|                  |                  |
|------------------|------------------|
| 1 Bias (-) (GND) | 6 LED (+)        |
| 2 Reset (-)      | 7 FIRE (NO)      |
| 3 Reset (+)      | 8 FIRE (C)       |
| 4 Bias (+)       | 9 PRE-ALARM (NO) |
| 5 LED (-) (GND)  | 10 PRE-ALARM (C) |

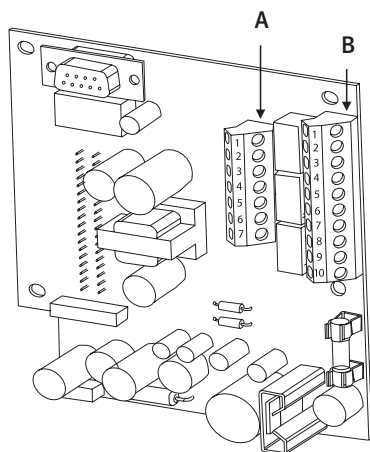

### VESDA VLC Termination Card (RO)

#### Terminal A

|                  |
|------------------|
| 1 FIRE (NO)      |
| 2 FIRE (C)       |
| 3 PRE-ALARM (NO) |
| 4 PRE-ALARM (C)  |
| 5 FAULT (NO)     |
| 6 FAULT (C)      |
| 7 FAULT (NC)     |

#### Terminal B

|                  |              |
|------------------|--------------|
| 1 Bias (-) (GND) | 6 LED (+)    |
| 2 Reset (-)      | 7 Power (-)  |
| 3 Reset (+)      | 8 Power (+)  |
| 4 Bias (+)       | 9 Power (-)  |
| 5 LED (-) (GND)  | 10 Power (+) |

| Specification                        |                                                                                                                                                                                                              |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supply voltage                       | 18 to 30 VDC                                                                                                                                                                                                 |
| Power consumption                    | 5.4 W quiescent, 5.9 W with alarm                                                                                                                                                                            |
| Current consumption                  | 225 mA quiescent, 245 mA with alarm                                                                                                                                                                          |
| Fuse rating                          | 1.6A                                                                                                                                                                                                         |
| Dimensions (WHD)                     | 225mm x 225mm x 85mm ( 8 <sup>7</sup> / <sub>8</sub> " x 8 <sup>7</sup> / <sub>8</sub> " x 3 <sup>3</sup> / <sub>8</sub> " )                                                                                 |
| Weight                               | 1.9kg (4.2lbs.)                                                                                                                                                                                              |
| Operating conditions                 | Ambient: 0°C to 39°C (32°F to 103°F) *<br>Tested: -10°C to 55°C (14°F to 131°F) *<br>Sampled Air: -20°C to 60°C (-4°F to 140°F) *<br>Humidity: 10% to 95% RH, non-condensing                                 |
| Storage conditions (non-operational) | Humidity: Dry (<95%)<br>Temperature: 0° to 85° C (32°F to 185°F)<br><i>Must not be exposed to sunlight or other radiation sources</i>                                                                        |
| Sampling network                     | Maximum area of Coverage 800sq.m (8000 sq.ft)                                                                                                                                                                |
| Maximum pipe lengths                 | 1 x 80m (260ft), 2 x 50m (164ft)                                                                                                                                                                             |
| Computer design tool                 | ASPIRE2™                                                                                                                                                                                                     |
| Pipe                                 | Internal Diameter 15mm – 21mm ( <sup>9</sup> / <sub>16</sub> " – <sup>7</sup> / <sub>8</sub> " )<br>External Diameter 25mm (1")                                                                              |
| Relays                               | 3 Relays rated 2 A @ 30 VDC<br>Fire (NO)<br>Pre-Alarm (NO)<br>Alert/Fault (Maintenance & Isolate) (NC/NO)<br>Configurable as latching or non-latching                                                        |
| IP rating                            | IP30                                                                                                                                                                                                         |
| Cable access                         | 4 x 25mm (1") cable entries                                                                                                                                                                                  |
| Cable termination                    | Screw Terminal blocks 0.2–2.5sqmm (30–12 AWG)                                                                                                                                                                |
| Alarm sensitivity range              | 0.005% to 20% obs/m (0.0015% to 6.25% obs/ft)                                                                                                                                                                |
| Threshold setting range              | Alert: 0.005%–1.990% obs/m<br>(0.0015%–0.6218% obs/ft)<br>Pre-Alarm: 0.010%–1.995% obs/m<br>(0.0031%–0.6234% obs/ft)<br>Fire: 0.015%–20.00% obs/m<br>(0.0046%–6.25% obs/ft)*<br>*Limited to 4% obs/ft for UL |

## VESDA VLC

VLC-500 & VLC-505

|                                     |                                    |                                                                                                                                    |
|-------------------------------------|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Software features                   | Event log:                         | Up to 12,000 events stored in FIFO format Smoke level, user actions, alarms and faults with time and date stamp                    |
|                                     | AutoLearn:                         | Minimum 15 minutes, maximum 15 days. Recommended minimum 14 days. During AutoLearn thresholds are NOT changed from pre-set values. |
| Configurable general input (24 VDC) | Standby, Mains OK or Reset/Isolate |                                                                                                                                    |

\* Product UL listed for use from 0°C to 38°C (32°F to 104°F)

## Ordering Information

### Product

VESDA VLC – VESDAnet

VESDA VLC – Relays Only

Remote Display (relays)

Remote Display (no relays)

Remote Relays (no display)

### Part Number

VLC-505

VLC-500

VRT-J00

VRT-K00

VRT-500