


• NOHA MODEL 3SW

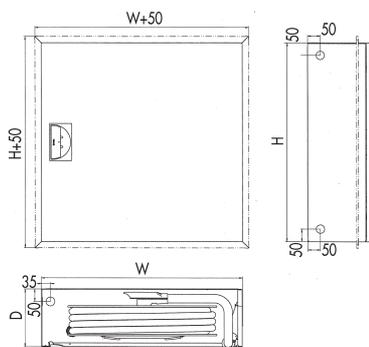

NOHA SWINGING FIRE HOSE REEL AND CABINET FOR WALL-MOUNTING OR RECESS-MOUNTING

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The reel can easily be removed from the cabinet to facilitate the installation.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 3SW IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA swinging arm with internal waterways
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side.
- NOHA door catch/release handle
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet powder coated RAL 9010 white gloss 15
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


| Model | Hose length in metres | | Dimensions in mm W x H x D | Order number |
|--------------------------------|-----------------------|-------|-------------------------------|--------------|
| | 19 mm | 25 mm | | |
| 3SW | 20 | | 795 x 795 x 230 | 555059 |
| 3SW | 25 | | 795 x 795 x 230 | 555060 |
| 3SW | 30 | | 795 x 795 x 230 | 555061 |
| 3SW | | 20 | 795 x 795 x 285 | 555062 |
| 3SW | | 25 | 795 x 795 x 285 | 555063 |
| 3SW | | 30 | 795 x 795 x 285 | 555064 |
| Trim frame for recess mounting | | | 795 x 795 | 555204 |

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Door for vision panel
- Door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 3SWA

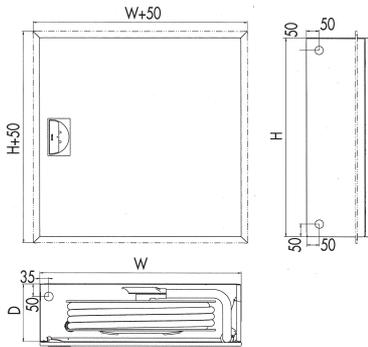

NOHA SWINGING FIRE HOSE REEL WITH AUTOMATIC STOP VALVE AND CABINET FOR WALL-MOUNTING OR RECESS-MOUNTING

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The reel can easily be removed from the cabinet to facilitate the installation. The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 3SWA IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated NOHA automatic stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA swinging arm with internal waterways
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catch/release handle
- Ø35mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet powder coated RAL 9010 white gloss 15
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


| Model | Hose length in metres | | Dimensions in mm W x H x D | Order number |
|--------------------------------|-----------------------|-------|-------------------------------|--------------|
| | 19 mm | 25 mm | | |
| 3SWA | 20 | | 795 x 795 x 230 | 555065 |
| 3SWA | 25 | | 795 x 795 x 230 | 555066 |
| 3SWA | 30 | | 795 x 795 x 230 | 555067 |
| 3SWA | | 20 | 795 x 795 x 285 | 555068 |
| 3SWA | | 25 | 795 x 795 x 285 | 555069 |
| 3SWA | | 30 | 795 x 795 x 285 | 555070 |
| Trim frame for recess mounting | | | 795 x 795 | 555204 |

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Door for vision panel
- Door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 3SW SST

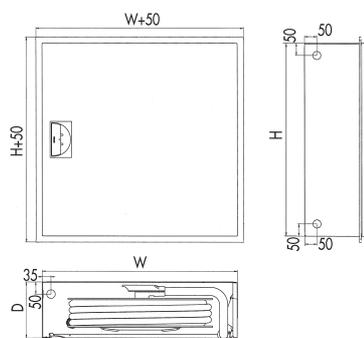

NOHA SWINGING FIRE HOSE REEL AND CABINET FOR RECESS-MOUNTING DOOR AND FRAME BRUSHED STAINLESS STEEL

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The reel can easily be removed to facilitate the installation.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 3SW SST IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA swinging arm with internal waterways
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catch/release handle
- Door and frame brushed stainless steel
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet and back wall powder coated RAL 9010 white gloss 15
- Double 45° wall sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


| Model | Hose length in metres | | Dimensions in mm W x H x D | Order number |
|---------|-----------------------|-------|-------------------------------|--------------|
| | 19 mm | 25 mm | | |
| 3SW SST | 20 | | 795 x 795 x 230 | 555086 |
| 3SW SST | 25 | | 795 x 795 x 230 | 555087 |
| 3SW SST | 30 | | 795 x 795 x 230 | 555088 |
| 3SW SST | | 20 | 795 x 795 x 285 | 555089 |
| 3SW SST | | 25 | 795 x 795 x 285 | 555090 |
| 3SW SST | | 30 | 795 x 795 x 285 | 555091 |

OPTIONS

- Door and frame polished stainless steel
- Door and frame brushed stainless steel for vision panel
- Door and frame polished stainless steel for vision panel
- Full vision panel
- Door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 3SWA SST

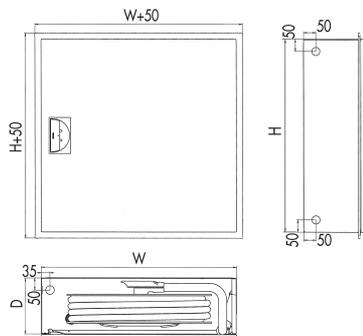

NOHA SWINGING FIRE HOSE REEL WITH AUTOMATIC STOP VALVE AND CABINET, FOR RECESS-MOUNTING DOOR AND FRAME BRUSHED STAINLESS STEEL

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The reel can easily be removed from the cabinet to facilitate the installation. The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 3SWA SST IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated NOHA automatic stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA swinging arm with internal waterways
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catch/release handle
- Door and frame brushed stainless steel
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet and back wall powder coated RAL 9010 white gloss 15
- Double 45° wall sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions

| Model | Hose length in metres | | Dimensions in mm W x H x D | Order number |
|----------|-----------------------|-------|-------------------------------|--------------|
| | 19 mm | 25 mm | | |
| 3SWA SST | 20 | | 795 x 795 x 230 | 555092 |
| 3SWA SST | 25 | | 795 x 795 x 230 | 555093 |
| 3SWA SST | 30 | | 795 x 795 x 230 | 555094 |
| 3SWA SST | | 20 | 795 x 795 x 285 | 555095 |
| 3SWA SST | | 25 | 795 x 795 x 285 | 555096 |
| 3SWA SST | | 30 | 795 x 795 x 285 | 555097 |

OPTIONS

- Door and frame polished stainless steel
- Door and frame brushed stainless steel for vision panel
- Door and frame polished stainless steel for vision panel
- Full vision panel
- Door for manual call point
- Hinges on left hand side
- Red hose
- Light hose

