


• NOHA MODEL S13

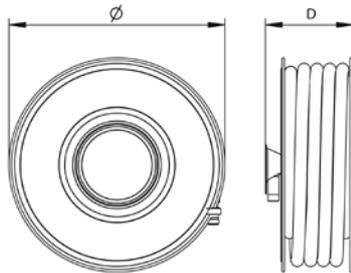

NOHA FIXED OFFSHORE HOSE REEL FOR WALL-MOUNTING

Titanium piping parts, for sea water.

For use in accommodation and living quarters, drilling areas, production areas offshore and at petrochemical plants.

NOHA MODEL S13 IS SUPPLIED WITH:

- Hose reel made of galvanized steel
- Piping parts titanium grade 2
- Paint according to NOHA offshore specification for galvanized steel, RAL 3000 red
- Oil resistant, antistatic rubber hose with working pressure 20 bar, and pressed SST hose couplings
- Water supply through the centre of the reel
- Hose coupling reel end: 1" BSP female, swivel, titanium
- Hose coupling nozzle end: 1" BSP male, fixed, gunmetal
- Water inlet 1" BSP male
- Design pressure 20 bar
- Design temperature $-9/+35^{\circ}\text{C}$
- Bolts and nuts in stainless steel
- NOHA installation instructions
- *Nozzle, stop valve and documentation are not included*
- **Options:** See page 13-15

Model	Hose length	Dimensions in mm $\varnothing \times D$	Order number	Dry weight
	25 mm			
S13	0 m	550 x 220	400 031	12 kg
S13	20 m	550 x 220	400 032	30 kg
S13	0 m	550 x 275	400 033	12 kg
S13	25 m	550 x 275	400 034	35 kg
S13	0 m	650 x 275	400 035	13 kg
S13	30 m	650 x 275	400 036	40 kg
S13	0 m	700 x 175	400 037	14 kg
S13	20 m	700 x 175	400 038	32 kg
S13	0 m	700 x 220	400 039	14 kg
S13	25 m	700 x 220	400 040	37 kg

