


745VSD3

TRILINGUAL VOICE SIREN DRIVER

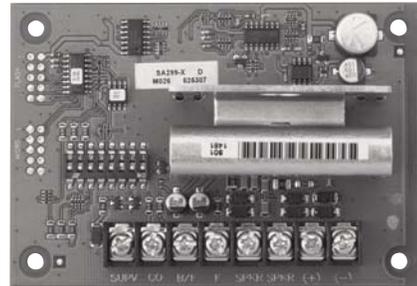

The 745VSD3 Trilingual Voice Siren Driver speaks separate messages in English, Spanish and French for fire, burglary and carbon monoxide alarms.

FEATURES

- Separate messages for fire, burglary and carbon monoxide conditions
- Choice of voice output in English, Spanish, French or combinations of each
- Distinctive siren sound for fire, burglary and CO conditions
- Supervision feature for speaker and speaker wiring
- Selectable input (high/low trigger) for fire/CO conditions
- Terminals allow for easy wiring and secure connections
- Operates on 12-16VDC
- Compact size for easy installation in the control cabinet
- Compatible with 8, 16 and 32 ohm speakers
- ETL Listed (when used with 32 ohm speakers)
- DIP switches for selecting language combinations

VOICE MESSAGES

BURGLARY

- English: You Have Violated A Protected Area...
The Police Have Been Called...Leave Immediately!
- Spanish: Usted Ha Violado Una Area Protegida...
La Policia Ha Sido Llamado...Salga Inmediatamente!
- French: Vous Avez Penetre Un Lieu Surveille...
La Police A Ete Averti...Evacuez Inmediatement!

FIRE

- English: Fire...Leave Immediately!
- Spanish: Fuego...Salga Inmediatamente!
- French: Au Feu...Evacuez Inmediatement!

CARBON MONOXIDE

- English: Carbon Monoxide has been Detected, Leave Immediately!
- Spanish: Monóxido de Carbono a Side Detectado...Salga Inmediatamente!
- French: Du Monocycle de Carbone a Eti Detecte...Evacuez Inmediatement!

745VSD3

TRILINGUAL VOICE SIREN DRIVER

SPECIFICATIONS

Electrical

Input Voltage: 12-16VDC
Speaker Wattage: 15 watt
Current draw: 8 ohm speaker, 1100mA (steady siren)
16 ohm speaker, 800mA (steady siren)
32 ohm speaker, 500mA (steady siren)*
Output: 108 dB
85 dB with 32 ohm speaker

Dimensions

4" x 2 5/8" x 1 1/4"

*Required for ETL applications

ORDERING

745VSD3	Trilingual Voice Siren Driver
745VSD3PK2	Trilingual Voice Siren Driver, with 32 ohm speaker (746-32)
746	8 ohm, 15 watt Indoor Speaker
746F	8 ohm, 15 watt Flush Mount Indoor Speaker
746-32	32 ohm, 15 watt Indoor Speaker
713	8 ohm, 40 watt Outdoor Speaker

Honeywell Security & Data Collection

Honeywell Security & Communications
2 Corporate Center Dr. Suite 100
P.O. Box 9040
Melville, NY 11747
www.honeywell.com

Honeywell

L/745VSD3D/D
May 2009
© 2009 Honeywell International Inc.