

## MINI AND MAXI VERTICUS

### 3, 4 and 5-Stage High Pressure Breathing Air Compressors

› **Pressure**


up to 6000 psig  
up to 414 bar

› **Charging Rate**

5 to 42 scfm  
142 to 1190 l/min

› **Power**

5 to 30 hp  
3.7 to 22 kW

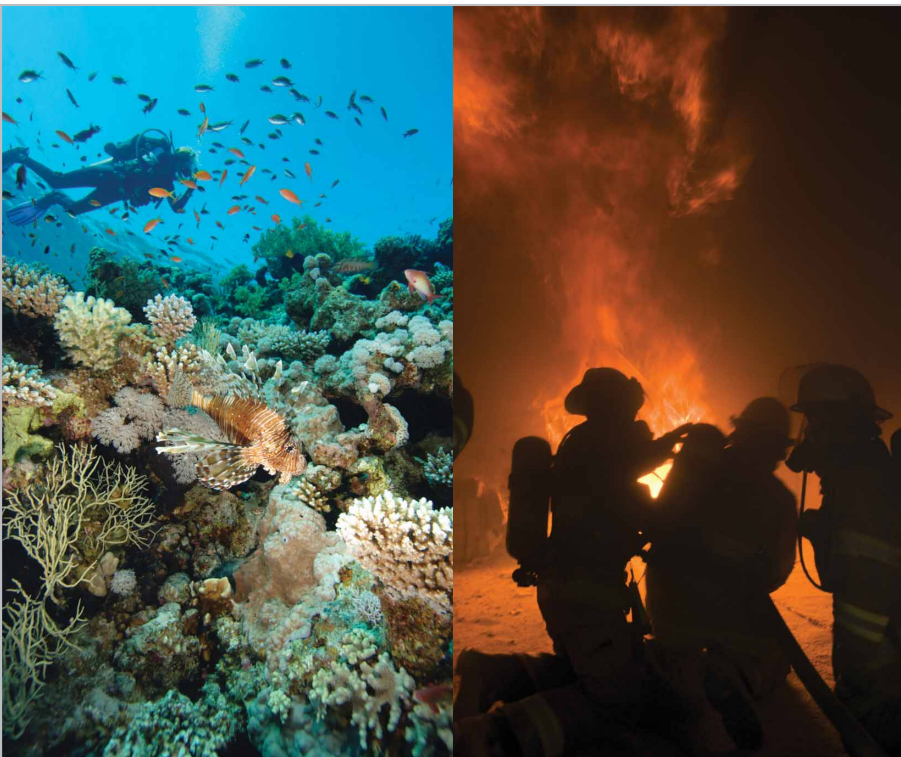

**MINI VERTICUS and MAXI VERTICUS combine compressor, air purification, SECURUS electronic moisture monitoring system and motor in a space saving, sound attenuated vertical cabinet designed to diminish operating sound levels.**

The MINI VERTICUS sound level is approximately 70 dBA and the MAXI VERTICUS is less than approximately 79 dBA (both at 3 ft / 1 meter distance).

## Mini and Maxi Verticus

### STANDARD SCOPE OF SUPPLY

- › BAUER breathing air purification system with SECURUS
- › BAUER PLC based controller with multicolor touchpad display
- › NEMA 4 rated electrical enclosure with **UL**® listed control panel
- › Compressor low oil pressure and high temperature safety shutdowns
- › Emergency stop push button & automatic start/stop control
- › Automatic condensate drain system with non-corrosive condensate reservoir and integrated float sensor. Automatic “Full” indication and compressor shutdown

### Maxi Verticus Models (add to above)

- › Vertically hinged front operations panel and lift-off side maintenance access doors
- › Inlet filter maintenance indicator
- › Interstage pressure gauges (locally mounted)

## Technical Data

Model	Charging rate <sup>1)</sup>		Number of stages	Motor		FAD <sup>2)</sup>	RPM	Purification system
	scfm	l/min		hp	kW			
<b>5000 psig (345 bar)</b>								
mVT6-E1/E3	6	170	3	5	3.7	5	1050	P2 SECURUS
mVT8-E1/E3	8.4	238	3	7.5	5.6	7	1250	P2 SECURUS
MVT20-E3	21	595	4	15	11	17.5	1300	P5 SECURUS
MVT26-E3	26.4	748	4	20	15	22	1350	P5 SECURUS
MVT42-E3 <sup>3)</sup>	42	1190	4	30	22	35	1300	P10 SECURUS
<b>6000 psig (414 bar)</b>								
mVT5H-E1/E3	5	142	3	5	3.7	4	1050	P2 SECURUS
mVT10H-E1/E3	9.7	275	4	7.5	5.6	8.1	1180	P2 SECURUS
mVT13H-E1/E3	13	368	4	10	7.5	10.8	1420	P2 SECURUS
MVT18H-E3	18	510	4	15	11	15	1325	P5 SECURUS
MVT25H-E3	25.2	714	5	20	15	21	1300	P5 SECURUS
MVT35H-E3 <sup>3)</sup>	35.9	1017	4	30	22	29.8	1200	P10 SECURUS

1) Based on recharging an 80 cubic foot tank from 500 to 3000 psig.

2) Compressor capacity referenced to standard inlet conditions.

3) 30 hp units are in a cabinet other than depicted.

E1 = Single Phase Electric, 230 VAC/60 Hz. E3 = Three Phase Electric, 230/460 VAC/60 Hz. Other voltages available on request.

mVT = MINI VERTICUS MVT = MAXI VERTICUS Dimensions and weight are approximate and are subject to change.

### BAUER COMPRESSORS INC.

1328 Azalea Garden Rd. | Norfolk, VA 23502  
 TEL. +1 (757) 855-6006  
 FAX +1 (757) 857-1041  
[sls@bauercomp.com](mailto:sls@bauercomp.com)  
[www.bauercomp.com](http://www.bauercomp.com)

### BAUER MIAMI

10052 N.W. 53rd St. | Sunrise, FL 33351  
 TEL. +1 (954) 746-2504  
 FAX +1 (954) 746-2510  
[bflsales@bauercomp.com](mailto:bflsales@bauercomp.com)

### BAUER SAN FRANCISCO

267 East Airway Blvd. | Livermore, CA 94551  
 TEL. +1 (925) 449-7210  
 FAX +1 (925) 449-7201  
[bauersf@bauercomp.com](mailto:bauersf@bauercomp.com)

VT

229.10.10.3SP

subject to alteration without notice or obligation

### AVAILABLE ACCESSORIES (factory installed)

#### Mini Verticus Models

- › Audible alarms for safety shutdowns
- › CO monitor
- › Interstage pressure gauges (locally mounted)

#### Maxi Verticus Models

- › Audible alarms for safety shutdowns
- › CO monitor with remote display

### DIMENSIONS L x W x H inches (mm)

- › MINI VERTICUS 29 x 49 x 58 (737 x 1245 x 1473)
- › MAXI VERTICUS 44 x 52 x 72 (1118 x 1321 x 1830)

### WEIGHT pounds (kg)

- › MINI VERTICUS 880 - 950 (400 - 432)
- › MAXI VERTICUS 1050 - 1530 (476 - 694)