


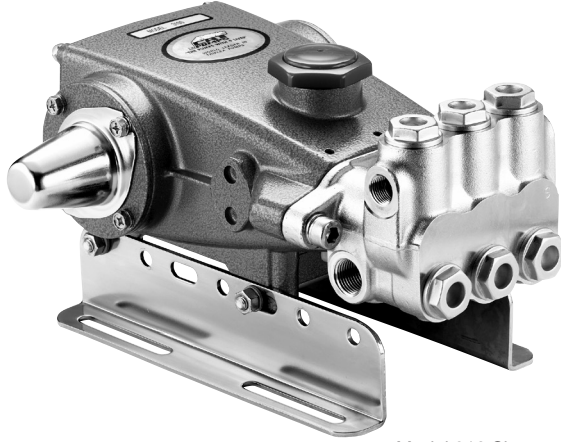

Model 310 Shown
(Rails and Shaft Protector Sold Separately)

FEATURES

- Triplex design offers high efficiency and low pulsation.
- Durable high pressure seals are lubricated and cooled by pumped liquid.
- Pre-set Lo-Pressure Seals provide secondary protection against external leaks and require no packing adjustment.
- Optional FPM and EPDM o-rings and special HT and ST seals provides broad liquid compatibility.
- Alternate crankshaft strokes offers flexibility with belt, clutch or direct-drive installation.

COMMON SPECIFICATIONS

Bore	0.787"	(20 mm)
Crankcase Capacity	18 oz.	(0.55 l)
Maximum Liquid Temperature	160°F	(71°C)
Above 130°F call CAT PUMPS for inlet conditions and elastomer recommendations.		
Inlet Ports (2)	1/2" NPTF	(1/2" NPTF)
Discharge Ports (2)	3/8" NPTF	(3/8" NPTF)
Shaft Diameter	0.787"	(20 mm)
Weight	19.8 lbs.	(9 kg)
Dimensions	11.73 x 10.0 x 5.24" (298 x 254 x 133 mm)	

⚠ CAUTIONS AND WARNINGS

All High Pressure Systems require a primary pressure regulating device (i.e. regulator, unloader) and a secondary pressure relief device (i.e. pop-off valve, relief valve). Failure to install such relief devices could result in personal injury or damage to pump or property. CAT PUMPS does not assume any liability or responsibility for the operation of a customer's high pressure system.

Read all CAUTIONS and WARNINGS before commencing service or operation of any high pressure system. The CAUTIONS and WARNINGS are included in each service manual and with each Data sheet. CAUTIONS and WARNINGS can also be viewed online at www.catpumps.com/cautions-warnings or can be requested directly from CAT PUMPS.

WARRANTY

View the Limited Warranty on-line at www.catpumps.com/warranty.

5 Frame Plunger Pump

Standard Models

310, 340, 350

Sleeved Models

310S, 340S, 350S

SPECIFICATIONS

U.S. Measure

Metric Measure

MODEL 310, 310S

Flow	4.0 gpm	(15 l/m)
Pressure Range	100 to 2200 psi	(7 to 155 bar)
RPM	950 rpm	(950 rpm)
Inlet Pressure Range	-5 to 60 psi	(-0.35 to 4 bar)
Stroke	0.709"	(18 mm)

MODEL 340, 340S Direct Drive

Flow	4.0 gpm	(15 l/m)
Pressure Range	100 to 1800 psi	(7 to 125 bar)
RPM	1725 rpm	(1725 rpm)
Inlet Pressure Range	Flooded to 60 psi	(Flooded to 4 bar)
Stroke	0.394"	(10 mm)

MODEL 350, 350S Direct Drive

Flow*	5.0 gpm	(19 l/m)
Pressure Range	100 to 1500 psi	(7 to 105 bar)
RPM	1725 rpm	(1725 rpm)
Inlet Pressure Range	Flooded to 60 psi	(Flooded to 4 bar)
Stroke	0.472"	(12 mm)

*This specification for intermittent, fresh water duty.

ELECTRIC HORSEPOWER REQUIREMENTS

MODEL	FLOW		PRESSURE					MOTOR PULLEY SIZE	
			psi 1200	psi 1500	psi 1800	psi 2000	psi 2200	Using 1725 rpm Motor & Std. 8" Pump Pulley	
	U.S. gpm	l/m	bar 85	bar 105	bar 125	bar 140	bar 155	rpm	Pulley O.D.
310	5.0	19	4.1	5.1	N/A	N/A	N/A	1190	5.5
	4.0	15	3.3	4.1	5.0	5.5	6.0	950	4.4
	3.0	11.4	2.5	3.1	3.7	4.2	4.5	713	3.3
340	4.0	15	3.3	4.1	5.0	N/A	N/A	1725	Direct Drive
350	5.0	19	4.1	5.1	N/A	N/A	N/A	1725	Direct Drive

**DETERMINING
THE PUMP R.P.M.**

Rated gpm

= "Desired" gpm

Rated gpm

= "Desired" rpm

**DETERMINING
THE REQUIRED H.P.**

gpm x psi

= Electric Brake

1460

H. P. Required

**DETERMINING
MOTOR PULLEY SIZE**

Motor Pulley O.D.

= Pump Pulley O.D.

Pump rpm


Motor rpm

See complete Drive Packages [Incls: Pulleys, Belts, Hubs, Key] Tech Bulletin 003.
Refer to pump **Service Manual** for repair procedure and additional technical information.

"Customer confidence is our greatest asset"

PARTS LIST

ITEM	PART NUMBER		DESCRIPTION		QTY
	310	310S			
	340	340S			
	350 MATL	350S MATL			
2	30057 STL	30057 STL	Key (M6x6x25)		1
5	92519 STZP	92519 STZP	Screw, HHC, Sems (M6x16)		8
	125824 STCP R	125824 STCP R	Screw, HHC, Sems (M6x16)		8
8	43344 AL	43344 AL	Cover, Bearing		1/2
10	43343 NBR	43343 NBR	O-Ring, Bearing Cover - 70D		2
11	43222 NBR	43222 NBR	Seal, Oil, Crankshaft - (310, 350-2) (340-1)		1/2
15	14480 STL	14480 STL	Bearing, Ball		2
20	45883 HS	45883 HS	Rod, Connecting Assy [09/05]		3
25	43342 FCM	43342 FCM	Crankshaft, Dual End - 310, 310S		1
	44945 FCM	44945 FCM	Crankshaft, Single End - 340, 340S		1
	43838 FCM	43838 FCM	Crankshaft, Dual End - 350, 350S		1
30	44949 AL	44949 AL	Cover, Blind Shaft - 340		1
31	828710 —	828710 —	Protector, Oil Cap w/Foam Gasket		1
32	43211 ABS	43211 ABS	Cap, Oil Filler		1
33	14177 NBR	14177 NBR	O-Ring, Filler Cap - 70D		1
37	92241 —	92241 —	Gauge, Oil, Bubble w/Gasket		1
38	44428 NBR	44428 NBR	Gasket, Flat, Oil Gauge - 80D		1
40	92520 STZP	92520 STZP	Screw, HHC, Sems (M6x20)		4
	126541 STCP R	126541 STCP R	Screw, HHC, Sems (M6x20)		4
48	25625 STCP	25625 STCP	Plug, Drain (1/4"x19 BSP)		1
49	23170 NBR	23170 NBR	O-Ring, Drain Plug - 70D		1
50	48772 AL	48772 AL	Cover, Rear [10/01] (See Tech Bulletin 090)		1
51	48773 NBR	48773 NBR	O-Ring, Rear Cover [10/01] (See Tech Bulletin 090)		1
53	48769 AL	48769 AL	Crankcase [05/02] (See Tech Bulletin 090)		1
56	43355 POP	43355 POP	Pan, Oil		1
64	43351 CM	43351 CM	Pin, Crosshead		3
65	43365 ZZCP	43365 ZZCP	Rod, Plunger		3
70	43228 NBR	43228 NBR	Seal, Oil, Crankcase		3
75	43328 S	43328 S	Slinger, Barrier		3
88	45697 S	45697 S	Washer, Keyhole (M18)		3
90	43367 CC	43367 CC	Plunger (M20x72)		3
96	43235 PTFE	43235 PTFE	Back-up-Ring, Plunger Retainer		3
97	17399 NBR	17399 NBR	O-Ring, Plunger Retainer - 80D		3
	14160 FPM	14160 FPM	O-Ring, Plunger Retainer - 80D		3
	◆ 46204 EPDM	◆ 46204 EPDM	O-Ring, Plunger Retainer - 70D		3
98	45891 CU	45891 CU	Gasket		3
99	104360 S	104360 S	Retainer, Plunger w/Stud		3
100	45688 PVDF	45688 PVDF	Retainer, Seal, 2-Pc [04/06] (See Tech Bulletin 105)		3
101	43302 —	43302 —	Wick, Long Tab		3
106	43305 NBR	43305 NBR	Seal, LPS w/S-Spg		3
	45153 FPM	45153 FPM	Seal, LPS w/SS-Spg		3
	◆ 48429 EPDM	◆ 48429 EPDM	Seal, LPS w/SS-Spg		3
	76305 ST	76305 ST	Seal, LPS w/S-Spg		3
120	45679 BB	45679 BB	Case, Seal		3
121	14200 NBR	14200 NBR	O-Ring, Seal Case - 70D		3
	11719 FPM	11719 FPM	O-Ring, Seal Case		3
	◆ 48907 EPDM	◆ 48907 EPDM	O-Ring, Seal Case		3
125	43307 SNG	43307 SNG	Seal, HPS w/S		3
	44936 FPM	44936 FPM	Seal, HPS w/SS		3
	46667 HT*	46667 HT*	Seal, HPS "Hi-Temp", 2-Pc w/S-Support		3
139	22179 BBBCP	22179 BBBCP	Plug, Inlet (1/2" NPT)		1
162	48361 D	48361 D	Back-up-Ring, Seat		6
163	43358 NBR	43358 NBR	O-Ring, Seat - 70D		6
	44938 FPM	44938 FPM	O-Ring, Seat - 70D		6
	◆ 48908 EPDM	◆ 48908 EPDM	O-Ring, Seat		6
164	43725 S	43725 S	Seat		6
166	43723 S	43723 S	Valve		6
167	43750 S	43750 S	Spring, Valve		6
168	44565 PVDF	44565 PVDF	Retainer, Valve Spring		6
172	17615 NBR	17615 NBR	O-Ring, Valve Plug - 75D		6
	15855 FPM	15855 FPM	O-Ring, Valve Plug - 70D		6
	◆ 48431 EPDM	◆ 48431 EPDM	O-Ring, Valve Plug - 75D		6
174	43849 BBBCP	43849 BBBCP	Plug, Valve		6
185	44837 BBBCP	—	Head, Manifold		1
	—	46278 FBB	Head, Manifold, Sleeved		1
188	126520 STCP R	126520 STCP R	Screw, HSH, Sems (M10x35)		2
250	118672 STCP	118672 STCP	Protector, Shaft (Belt Drive Only)		1
255	30243 STZP	30243 STZP	Mount, Direct (Belt Drive Only)		1
260	30611 STZP	30611 STZP	Mounting, Angle Rail (Belt Drive Only)		1
265	30659 —	30659 —	Mount, Assy (Incls: 30611, 30633, 118672) (Belt Drive Only)		1
270	30633 STL	30633 STL	Assy, Pulley & Key (Incls: 30058, 30057) (Belt Drive Only)		1
275	30944 STL	30944 STL	Assy, Hub & Key (Incls: 30057, 30945) (Belt Drive Only)		1
283	34334 —	34334 —	Kit, Oil Drain (3/8" x 24") (See Tech Bulletin 077)		1
298	34962 STZP	34962 STZP	Clutch Assy, Single Groove, 20mm, 12VDC		1
	34963 STZP	34963 STZP	Clutch Assy, Dual Groove, 20mm, 12VDC		1
299	810027 BBBCP	816551 FBB	Head, Complete		1

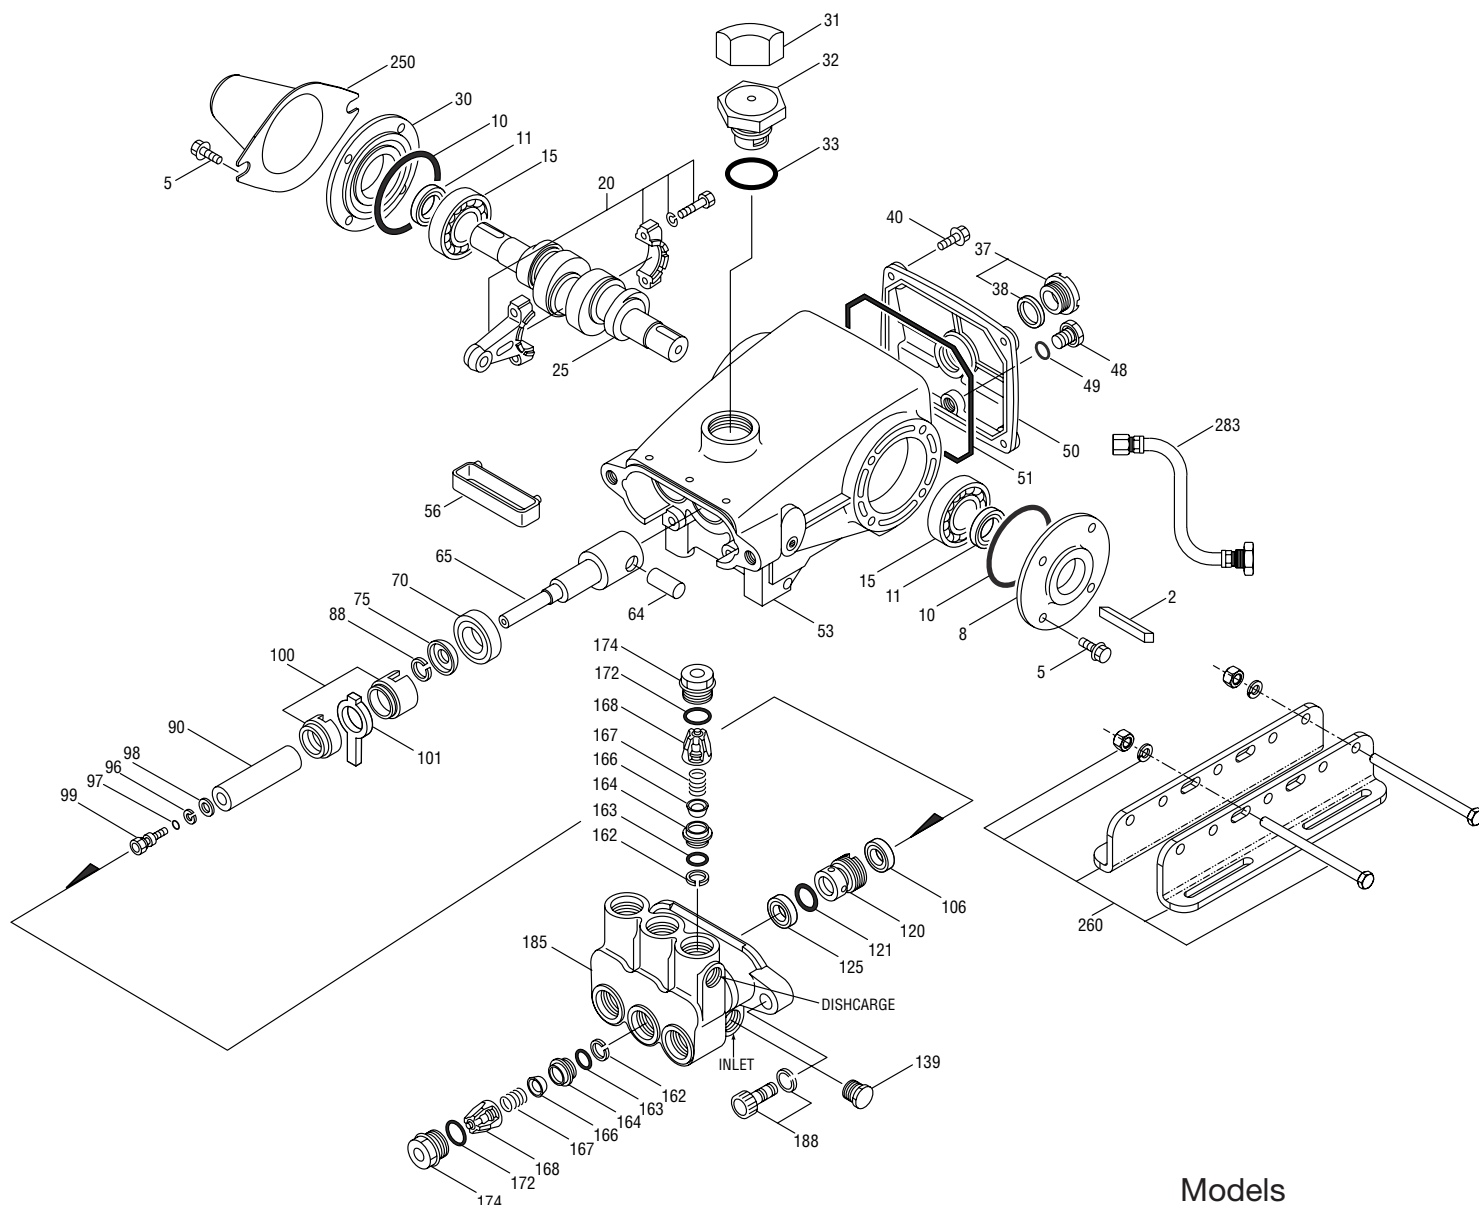

Models
 Standard - 310, 340, 350
 Sleeved - 310S, 340S, 350S
 July 2010

	310		310S			
	340		340S			
	350	MATL	350S	MATL		
300	30623	NBR	30623	NBR	Kit, Seal (Incls: 97,101,106,121,125)	1
	34155	FPM	34155	FPM	Kit, Seal (Incls: 97,101,106,121,125)	1
	33623	HT	33623	HT	Kit, Seal, "Hi-Temp" (Incls: 97,101,106,121,125)	1
	◆ 31163	EPDM*	◆ 31163	EPDM*	Kit, Seal (Incls: 97,101,106,121,125)	1
310	30821	NBR	30821	NBR	Kit, Valve, Preassembled (Incls: 162-164,166-168,172)	2
	31821	FPM	31821	FPM	Kit, Valve, Preassembled (Incls: 162-164,166-168,172)	2
	◆ 31162	EPDM	◆ 31162	EPDM	Kit, Valve, Preassembled (Incls: 162-164,166-168,172)	2
350	30696	STZP	30696	STZP	Plier, Reverse	1
351	33004	STZP	33004	STZP	Socket, Seal Case (1/2" Drive)	1
—	—	—	—	—	BD Motors - See Individual Data Sheet	
—	6107	—	6107	—	Oil, Bottle (21 oz.) ISO-68 Hydraulic	1
					(Fill to specified crankcase capacity prior to start-up)	

Bold print part numbers are unique to a particular pump model. Italics are optional items. ◆ Silicone oil/grease required. R Components comply with RoHS Directive.

[] Date of latest production change. *Review individual parts in each kit for material code identification.


View Tech Bulletins 002, 003, 008, 024, 027, 032, 035, 036, 043, 045, 046, 049, 052, 053, 054, 073, 074, 077, 079, 083, 090, 105 for additional information.

MATERIAL CODES (Not Part of Part Number): ABS=ABS Plastic AL=Aluminum BB=Brass BBGP=Brass/Chrome Plated CC=Ceramic CM=Chrome-moly CU=Copper


D=Acetal EPDM=Ethylene Propylene Diene Monomer FBB=Forged Brass FCM=Forged Chrome-moly FPM=Fluorocarbon HS=High Strength

HT=High Temp (EPDM Alternative) NBR=Medium Nitrile (Buna-N) POP=Polypropylene PTFE=Pure Polytetrafluoroethylene PVDF=Polyvinylidene Fluoride

S=304SS SNG=Special Blend (Buna) STL=Steel STCP=Steel/Chrome Plated STZP=Steel/Zinc Plated ZZCP=Chrome Plated/Steel - Zamak

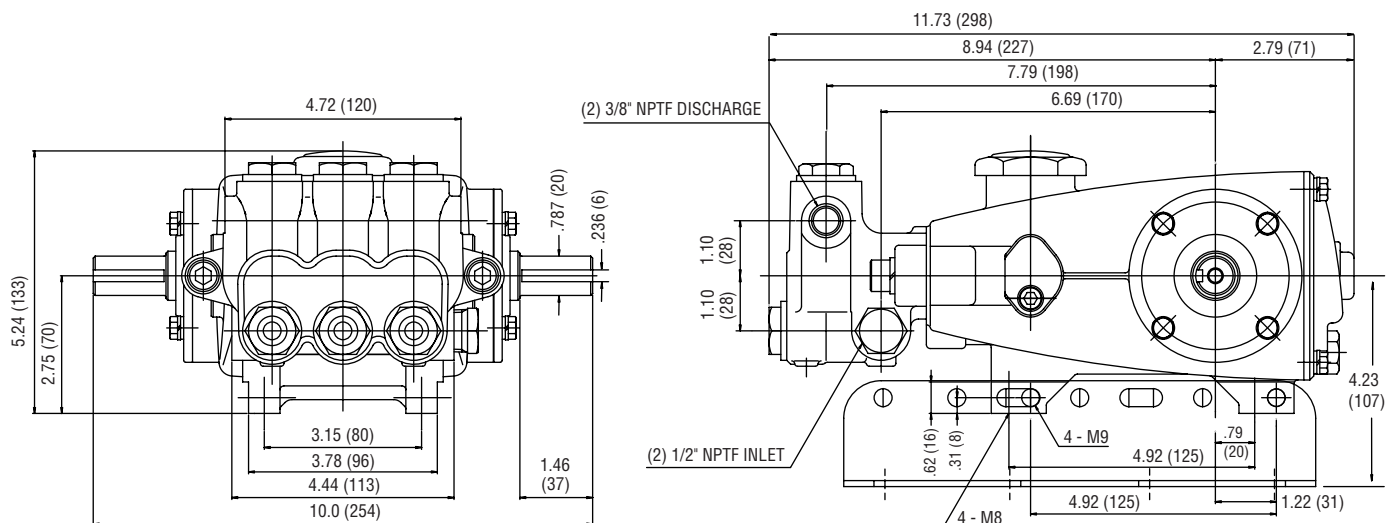

Models 310, 340, 350, 310S, 340S, 350S

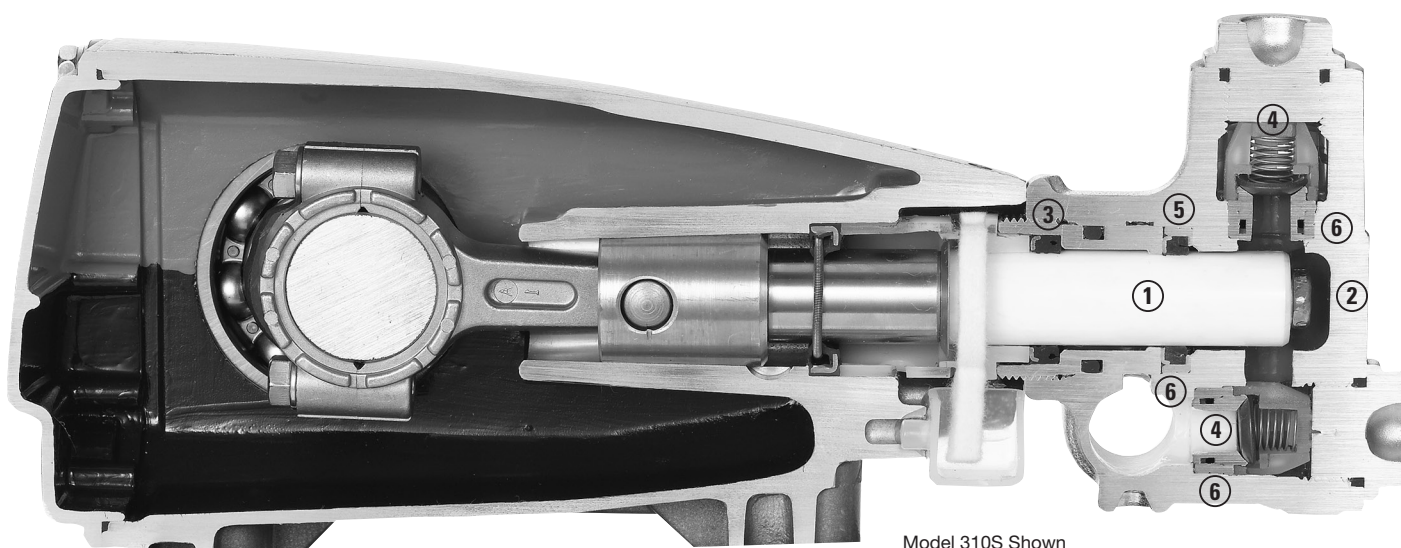

Model 310S Shown

- 1 Special concentric, high-density, polished, solid ceramic **plungers** provide a true wear surface and extended seal life.
- 2 **Manifolds** are a high tensile strength forged brass for long life, continuous duty and compatibility.
- 3 100% wet **seal** design adds to service life by allowing pumped liquids to cool and lubricate on both sides.
- 4 Stainless steel **valves, seats and springs** provide corrosion-resistance, ultimate seating and extended life.
- 5 Specially formulated, CAT PUMP exclusive, **Hi-Pressure Seals** offer unmatched performance and seal life.
- 6 Precision, press-fit, **304 stainless steel sleeves** in both the seal and valve chambers provide extended life (S models only).

World Headquarters

CAT PUMPS

1681 - 94th Lane N.E. Minneapolis, MN 55449-4324

Phone (763) 780-5440 — FAX (763) 780-2958

e-mail: techsupport@catpumps.com

www.catpumps.com

International Inquiries

FAX (763) 785-4329

e-mail: intlsales@catpumps.com



The Pumps with Nine Lives

CAT PUMPS (U.K.) LTD.

1 Fleet Business Park, Sandy Lane, Church Crookham

FLEET, Hampshire, GU52 8BF, England

Phone Fleet 44 1252-622031 — Fax 44 1252-626655

e-mail: sales@catpumps.co.uk www.catpumps.co.uk

N.V. CAT PUMPS INTERNATIONAL S.A.

Heiveldekens 6A, B-2550 Kontich, Belgium

Phone 32-3-450.71.50 — Fax 32-3-450.71.51

e-mail: cpi@catpumps.be www.catpumps.be

CAT PUMPS DEUTSCHLAND GmbH

Buchwiese 2, D-65510 Idstein, Germany

Phone 49 6126-9303 0 — Fax 49 6126-9303 33

e-mail: catpumps@t-online.de www.catpumps.de