


# PFP-14HPKHL-EM-MR

## PRESSURE AND VOLUME PUMP

*This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on a steel protective frame with folding handles.*

*Also available in skid version*

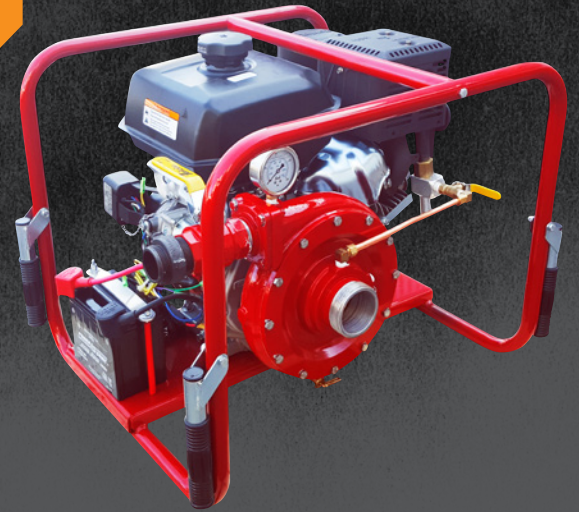

## ENGINE SPECIFICATIONS

- CH440 Kohler air cooled engine
- Single cylinder, 4-stroke gasoline engine
- 12V electric start with recoil start as backup
- 1.8 gallon (7 l) integrated fuel tank
- 10 amp. charging system

## PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump, direct drive
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38 mm) delivery outlet with 1/4-turn ball valve
- One 2 1/2" (64 mm) suction inlet
- Dimensions: Length: 21 3/4" (552 mm); Width: 26 1/2" (673 mm); Height: 20 1/4" (514 mm)
- Wet weight: 162 lbs (74 kg)


## INCLUDED ACCESSORIES

- Pressure gauge
- 12V-Battery
- Low oil shut-off

## PERFORMANCE

**MAX FLOW: 240 GPM**  
**MAX PRESSURE: 130 PSI**  
**215 GPM @ 25 PSI**

**170 GPM @ 50 PSI**  
**105 GPM @ 100 PSI**

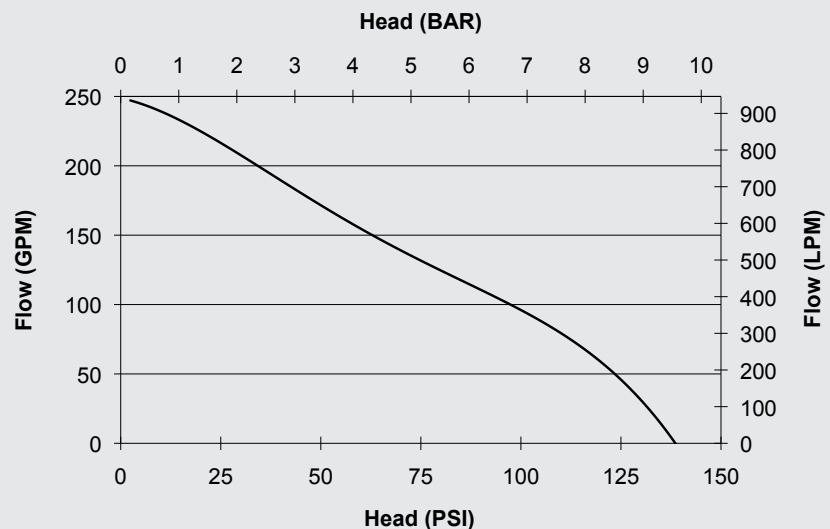

0816

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)