


PFP-40HPKHL-MF-BG

GAS POWERED PUMP

This high pressure/high volume pump is made to fight fire or supply water to the fire scene. Engine and pump are mounted on a chassis made of profile steel with shock absorbers and heavy duty carrying handles.

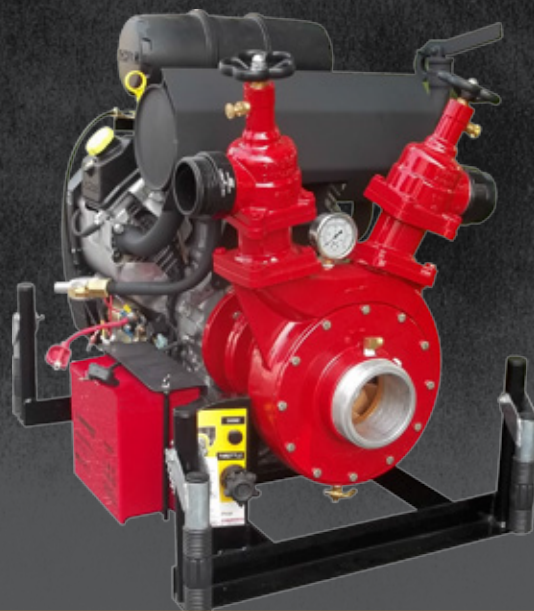

ENGINE SPECIFICATIONS

- CH1000 Kohler / CET engine
- 2-cylinder, 4-stroke gasoline engine
- 12V electric start
- 10 liters integrated fuel tank

PUMP UNIT SPECIFICATIONS


- C.E.T. single stage centrifugal pump.
- Pump body made from high resistant aluminum alloy.
- Bronze impeller.
- Mechanical shaft seal.
- Stainless steel pump shaft.
- Exhaust priming system, guaranteed up to 20' (6 meter lift).
- Two 2 1/2" (65 mm) delivery outlet with pressure valve.
- One 4" (100 mm) suction inlet.
- Dimensions: Length: 34" (865 mm); Width: 24" (610 mm); Height: 31" (788 mm).
- Weight: 280 lbs (127 Kg).

INCLUDED ACCESSORIES

- 25 Amps alternator.
- Vernier throttle.
- 12-V Battery.
- Choke control lever.
- Pressure gauge.

PERFORMANCE

MAX FLOW : 680 GPM 300 GPM @ 100 PSI
MAX PRESSURE : 205 PSI 180 GPM @ 150 PSI
515 GPM @ 25 PSI 50 GPM @ 200 PSI

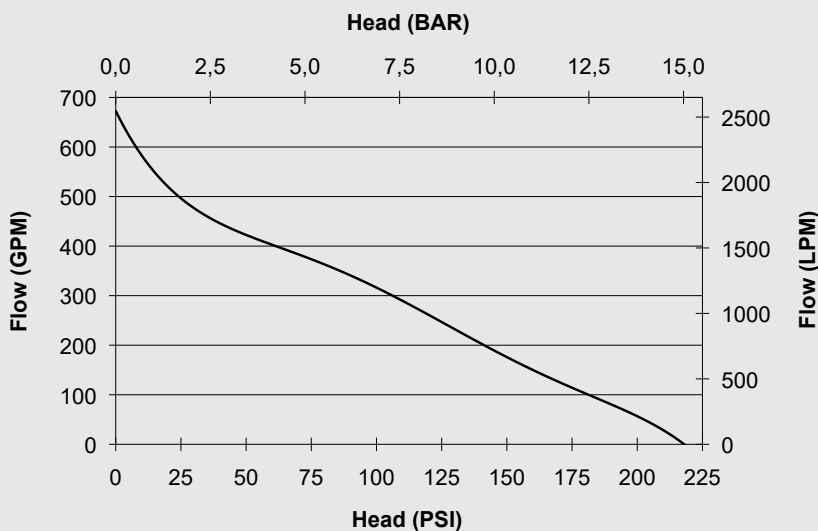

0217

LIMITED WARRANTY

- 1 YEAR.



ACCEPT ONLY THE BEST



A CENTURY
OF ENGINEERING
FOR THE BRAVEST

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com