

Instructions - #TLW2S





(A) Battery Installation

Remove the bottom of the case, install 6V batteries, (TLW2S will operate with one or two) and snap the case top back on. The orientation of the spring terminals on the batteries does not matter.

(B) Operation - Steady Burn

With the front of the light (label/diamondshaped nut side) facing forward, use the included key **(C)** to turn the light on and off by inserting it into one of the holes located at either end of the case and pushing it in to activate switch. Sliding the switch from right to left turns the unit on, left to right turns it off.



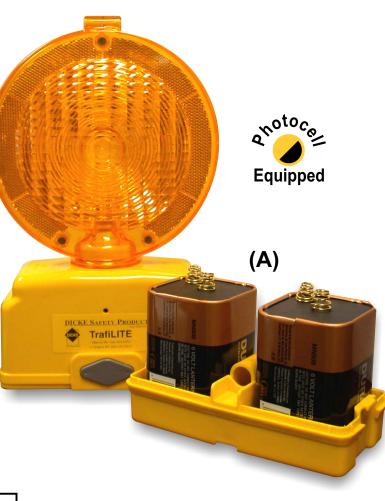

Note:

Be sure to test the unit in natural light, fluorescent lighting may not cause the sensor to turn the light off.

DICKE Safety Products • 1201 Warren Ave. • Downers Grove, Illinois 60515 • Ph: 877.891.0050 • Fax: 630.969.3973 1845 Anunsen Street N.E. • Salem, Oregon 97301 • Ph: 800.333.5641 • Fax: 503.364.0340 • www.dicketool.com