

Chief™

Fixed flow Chief™ nozzles efficiently deliver a constant gallonage from straight stream to full fog. The simple rugged design makes the Chief™ easy to use, train with and reliable in tough situations. Superior hydraulics due to a fully machined waterway result in excellent stream quality and reach. The Chief™ is also available in true low pressure versions with specifically engineered, calibrated and labeled stems down to 50 psi. With more than 300 available variations the Chief™ is easily customized to meet your specific needs.



HANDLINE NOZZLES









CHIEF™

HANDLINE NOZZLES

1-7

CHIEF™ CONFIGURATIONS

Figure 1	 <p>STANDARD (Shown with optional pistol grip)</p>	<i>Fig. 1</i>
Figure 2	 <p>TIP ONLY</p>	<i>Fig. 2</i>
Figure 3	 <p>BREAK-APART (Shown with optional pistol grip)</p>	<i>Fig. 3</i>
Figure 4	 <p>BREAK-APART WITH INTEGRAL SMOOTH BORE (Shown with optional pistol grip)</p>	<i>Fig. 4</i>
Figure 5	 <p>PLAYPIPE WITH NOZZLE</p>	<i>Fig. 5</i>
Figure 6	 <p>PLAYPIPE WITH TIP</p>	<i>Fig. 6</i>

Figures depict general product types only and are not intended to be inclusive of all product features.

OPTIONS

HANDLES

TAB



HORSESHOE



BASES



LONG



SHORT

THREADS

All nozzles are NHT unless otherwise specified. See index T-12 for optional base threads, including British instantaneous.


BREAK-APART COMPONENTS

Ball shut-offs and/or playpipes referenced here may be found on page 1-24.

MOLDED URETHANE TEETH



COLORS

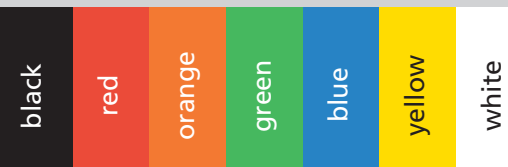

Color options available for pistol grip, bumper, and handle. **White bumper not available.** Select-O-Matic® nozzle standards are a yellow bumper, chrome handle and natural Elk-O-Lite® pistol grip.

ADDITIONAL INFORMATION

PART NAME	PAGE #
Thread Information	T-12
Nozzle Flow Data	T-2
Hose and Nozzle Accessories	2-1
Foam Expansion Tubes	1-23
Glow Bumper	1-3