

Pro LED

LED Beacon



FEATURES

- Versatile warning beacon for a variety of applications
- Short and tall domes available
- Single- and dual-color models
- (25) flash patterns
- Multi-voltage, 12/24 Vdc
- Built-in permanent 1" pipe mount aluminum die-cast base
- Five-year warranty

APPROVALS

- SAE J845 Class 1 (Amber, Blue, Red, White)
- SAE J845 Class 3 (Green)
- CCR Title 13 (Amber, Blue, Red)
- NFPA 1901 compliant
- IP69K

FS TECHNOLOGIES



Versatile Warning Beacon Built for a Variety of Applications

For those seeking a work truck beacon with versatile capabilities, turn to the Pro LED Beacon light. Available in both tall and short models, this beacon warning light comes in a variety of different colors including several dual-color models. Whether you are looking for an Amber beacon, Blue, Green, Red, White, or some combination of these colors, the Pro LED Beacon is an ideal choice. With (25) unique flash patterns including a rotating pattern, the Pro LED Beacon has the capabilities needed to serve as an effective warning light in countless industries and vehicle applications.

Federal Signal's Pro LED Beacon is exceptionally versatile thanks to the numerous industry-leading technologies incorporated into its design. It utilizes Solaris® LED reflector technology to provide 360-degrees of brilliant warning light and comes equipped with low-power functionality. Thanks to FSLink™ syncing technology, it can even be paired with the other FSLink warning lights on your vehicle to present a synchronized warning light pattern.

The Pro LED Beacon is an excellent beacon for regulatory compliance and carries the SAE J845 Class 1 and CCR Title 13 approvals.

This beacon has the ability to serve as a valuable tool for safety and compliance in numerous industries including the towing industry, construction, utility/maintenance, snow removal, landscaping, and many others.

The Pro LED Beacon was designed to serve as a work truck beacon and was designed to stand up to the adverse conditions sometimes faced on the road or job site. The beacon is securely mounted with a 1-inch pipe mount and is IP69K rated against dust and water. This LED beacon can also be equipped with an optional branch guard for those seeking additional protection.



Shown with branch guard
(sold separately)



Built-in permanent/1-inch
pipe mount die-cast aluminum base



HOW TO ORDER

LED Color

A B G R W

Dome Color

A B C R

PERMANENT/1-INCH PIPE MOUNT, SINGLE-COLOR, TALL DOME

300TMP-A-SB	Amber LEDs, Amber dome
300TMP-B-SB	Blue LEDs, Blue dome
300TMP-R-SB	Red LEDs, Red dome
300TMPC-A-SB	Amber LEDs, Clear dome
300TMPC-B-SB	Blue LEDs, Clear dome
300TMPC-G-SB	Green LEDs, Clear dome
300TMPC-R-SB	Red LEDs, Clear dome

PERMANENT/1-INCH PIPE MOUNT, DUAL-COLOR, TALL DOME

320TMP-AB-SB	Amber/Blue LEDs, Clear dome
320TMP-AG-SB	Amber/Green LEDs, Clear dome
320TMP-AW-SB	Amber/White LEDs, Clear dome

PERMANENT/1-INCH PIPE MOUNT, SINGLE-COLOR, SHORT DOME

300SMP-A-SB	Amber LEDs, Amber dome
300SMP-B-SB	Blue LEDs, Blue dome
300SMP-R-SB	Red LEDs, Red dome
300SMPC-A-SB	Amber LEDs, Clear dome
300SMPC-B-SB	Blue LEDs, Clear dome
300SMPC-G-SB	Green LEDs, Clear dome
300SMPC-R-SB	Red LEDs, Clear dome

PERMANENT/1-INCH PIPE MOUNT, DUAL-COLOR, SHORT DOME

320SMP-AB-SB	Amber/Blue LEDs, Clear dome
320SMP-AG-SB	Amber/Green LEDs, Clear dome
320SMP-AW-SB	Amber/White LEDs, Clear dome


ACCESSORIES

300B-TALL	Branch guard, tall
300B-SHORT	Branch guard, short

SPECIFICATIONS

	TALL DOME	SHORT DOME
OPERATING VOLTAGE	12/24 Vdc	
CURRENT DRAW	2 A (Average) 4 A (Max)	
OPERATING TEMP	-22° to +149° F (-30° to +65° C)	
PHYSICAL SPECIFICATIONS		
DIAMETER	7.3 in (18.4 cm)	7.3 in (18.4 cm)
HEIGHT	5.3 in (13.3 cm)	3.6 in (9.2 cm)
SHIP WEIGHT		
	3.3 lb (1.5 kg)	3.0 lb (1.4 kg)

SHORT DOME BEACON

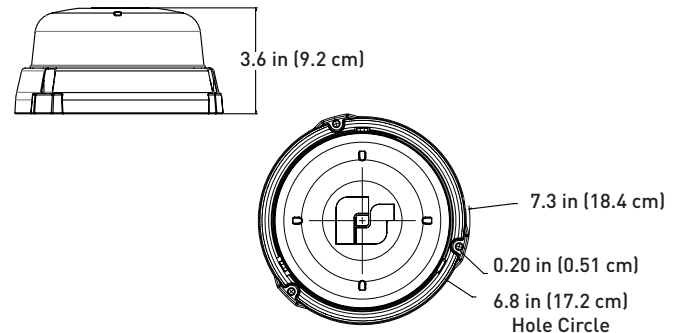

TALL DOME BEACON

