


<b>FBP6</b>	<b>6 kg</b>	<b>ABC Dry Powder</b>	<b>Fire Rating 27A / 144B</b>
<b>FBP9</b>	<b>9 kg</b>	<b>ABC Dry Powder</b>	<b>Fire Rating 34A / 233B</b>

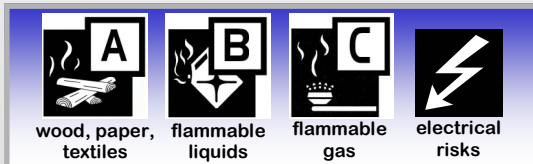

-  BSI accredited to BS EN3 & Kitemarked
-  Manufacturer's 5 year warranty
-  Stored pressure - Easy low cost maintenance
-  Safe for use on electrical equipment
-  Suitable for A,B & C class fires
-  Controlled discharge
-  Brass valve - Easy to read pressure gauge
-  Protective plastic base
-  Supplied with wall-mounting bracket

FBP6 and FBP9 are particularly suitable for use on vehicles having to meet the requirements of the Carriage of Dangerous Goods by Road (ADR) regulations.

Ideal for use in offices, agricultural machinery, farms, for a wide range of industrial and commercial applications, oil pump houses, filling stations, chemical paint houses and combustible places.

Refilling/Service: Should be carried out annually to BS 5306 Part 3, 2009. After complete or partial use the extinguisher should be refilled to BS 6643 Part 1, 1985. Both refilling and servicing to be carried out by a competent person. Spares available on request.

Model	FBP6	FBP9
Capacity	6 kg	9 kg
Total Weight	9.3 kg	13.4 kg
Total Height	543 mm	595 mm
Total Width (excluding hose)	220 mm	230 mm
Working Temp.	-30 <sup>o</sup> to +60 <sup>o</sup> C	-30 <sup>o</sup> to +60 <sup>o</sup> C
Discharge Time	18 secs	24 secs
Discharge Range	6 m	7 m
Operating Pressure	14 bar @ 20 <sup>o</sup> C	14 bar @ 20 <sup>o</sup> C
Minimum Burst Pressure	55 bar	55 bar
Packing Specification		
Qty Per Carton	1	1
Carton Dimensions	55x18x17 cm	60X20X20 cm
Carton Volume	0.017m <sup>3</sup>	0.024 m <sup>3</sup>
Carton Weight	9.7 kg	13.8 kg
Qty Extinguishers per Pallet	70	48
Pallet Dimensions	120x100x160 cm	120x100x148 cm
Pallet Volume	1.920 m <sup>3</sup>	1.776 m <sup>3</sup>
Pallet Gross Weight	700 kg	683 kg

