

# RM Series Rear Mount Fire Pumps



## FEATURES

### Low maintenance components

- Stainless steel shaft
- High strength bronze impeller
- Renewable bronze clearance rings
- Self-lubricated, self-adjusting mechanical seal

### No Gearbox, direct drive

### Low Noise

### Manifold systems available

### Available with full range of Hale accessories

- Master Intake Valve (MIV)
- Environmentally Safe Priming System (ESP)
- Thermal Relief Valve (TRV)
- Total Pressure Master (TPM)
- Semi-Automatic Priming Valve (SPVR)




## APPLICATIONS

- Rear mount pump driven by a Hale split drive line PTO, MGA, or RGA
- Meets NFPA 1901 standards

## MODELS

- RMB 500 to 1000 GPM (1893 to 3786 LPM)
- RMC 1000 to 1500 GPM (3786 to 5679 LPM)
- RME 1500 to 3000 GPM (5679 to 11358 LPM)

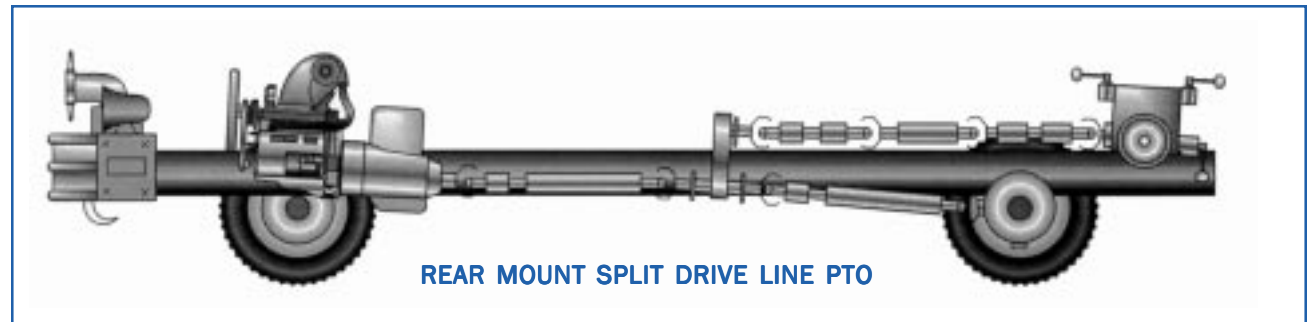

REAR MOUNT SPLIT DRIVE LINE PTO



IDEX CORPORATION

Hale Products Inc.  
Fire Suppression  
Equipment Group  
A Unit of IDEX Corp.  
700 Spring Mill Avenue  
Conshohocken, PA 19428  
Tel: 610/825-6300  
Fax: 610/825-6440  
www.haleproducts.co700

Hale Products Europe  
Fire Suppression  
Equipment Group  
A Unit of IDEX Corp.  
Charles Street  
Warwick, CV34 5LR England  
TEL: (44) 01926 825000  
FAX: (44) 01926 825066  
www.haleeurope.com

MADE IN THE USA



Note: Hale Products Inc. cannot assume responsibility for product failure resulting from improper maintenance or operation. Hale is responsible only to the limits stated in the product warranty. Product specifications contained in this material are subject to change without notice. Bulletin 786 Rev 2, 3/02 ©2002, Hale Products Inc.