

# Hydraulic Spreaders



MADE IN FRANCE



▼ Hydraulic Spreaders EHM 750 CX - EHL 620 / 800 CX / EHS 570 CX



The optimal force of **HYDR'AM**<sup>®</sup> tools assure complete safety during spreading, pulling, crushing and lifting operations.

## DESCRIPTION


High strength hardened light alloy unit. Can be used in wet conditions.

Tool comprises :

- 1 Double action cylinder.
- 1 Ergonomically shaped control handle with integrated safety device and piloting.
- Automatic locking mono coupling with flat faced pre-centering cone and metallic protection cap
- 2 Forged high strength light alloy arms fitted with interchangeable serrated tips without tools. The tips are made from high strength, hardened and anti-corrosion treated steel.

## OPTION :

- Pressure relief valve
- Adjustable carrying handle

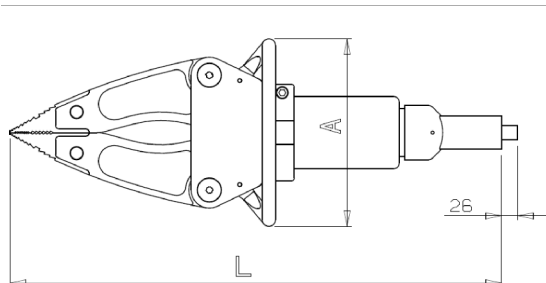

## CHARACTERISTICS

Model	EHM 750CX	EHL800CX	EHL620CX	EHS570 CX
Operating pressure	700 bar	700 bar	700 bar	700 bar
Spreading force	41 kN	66 kN	97 kN	92 kN
Maximum spreading force	> 132 kN	> 202 kN	> 373 kN	> 260 kN
Traction force	49 / 41 kN	128 / 51.2 kN	138 / 82 kN	114,4 / 62 kN
Maximum opening	750 mm	800 mm	620 mm	565 mm
Maximum Pulling Stroke	502 mm	565 mm	378 mm	431 mm
Dimensions (mm) LxAxH	834x335x230	885x385x225	786x385x220	936x395x269
Weight	18,48 kg	26,18 kg	23,88 kg	31,48 kg
Tool classification EN 13204	AS 41-750/18,48	BS 63-800/26,18	CS 88-620/23,88	CS 91-565/31,48

Powerful, Lightweight and Reliable in Rescue Operations

NO CONTRACTUAL DOCUMENT



Chemin du Lyonnais - 69720 St Bonnet de Mure FRANCE- 33 (0) 4 72 48 90 05 - fax:33 (0) 4 72 48 90 03

☎:Site : [www.hydram.com](http://www.hydram.com) - E-mail : [hydram@wanadoo.fr](mailto:hydram@wanadoo.fr)