


# AUTO CHARGE® 1200 REMOTE with PLC

## Low Profile Charger with Parasitic Load Compensation

### Features

- Parasitic Load Compensation (PLC) allows for user input of total accessory load amps on the vehicle. This allows the charger to shift the absorption stage set point so the battery voltage drops to the float voltage when desired current is reached
- Patented PLC Technology
- Low Profile - reduced height and lighter in weight
- Output voltage regulated
- Remote battery charge/condition indicator display
- Accommodates Lead-Acid, Gelled Electrolyte, AGM and Odyssey® battery types
- Configurable for 3-Step or Float Charging
- Selectable 1, 5 or 10 hour Safety Timer while in 3-Step mode
- Adjustable Parasitic Load Compensation (5-35 amperes)
- Power "ON" LED indicator
- System Status indicator
- Internal cooling fan

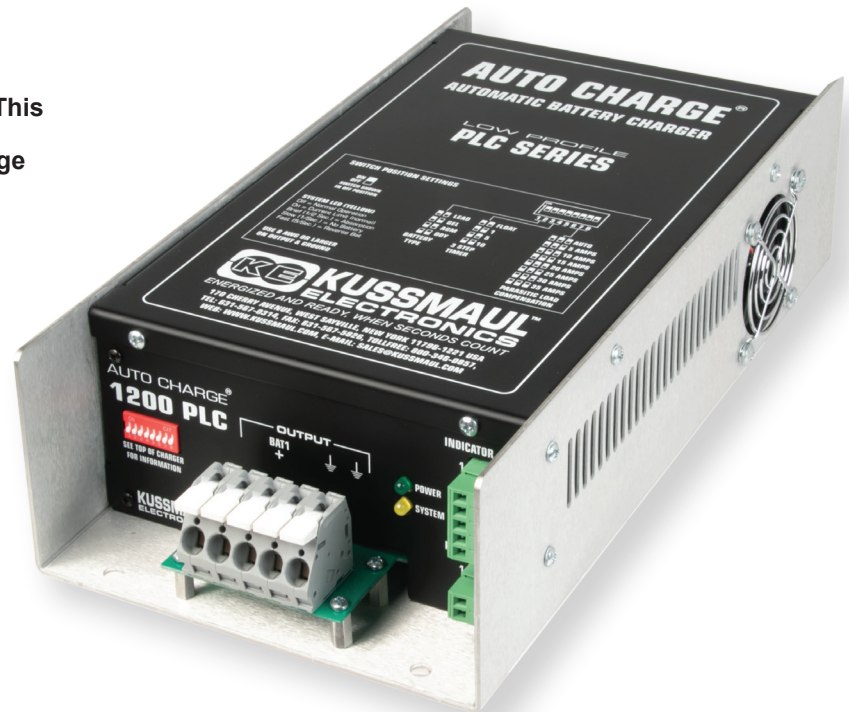


### Specifications:

**Input Power:** 120 Volts AC, 50/60 Hz, 5 Amps  
**Input Fuse:** 8A, Fast Blow  
**Output Power (Bat):** 12 Volts DC, 40 amps max.  
**Length:** 13.25"  
**Width:** 6.8"  
**Height:** 3.3"  
**Weight:** 7 lbs  
**Warranty:** 3 years

**Remote Display Options:**  
**Standard Indicator** 091-199-001  
**Deluxe Indicator** 091-194-IND-XX

**Compatible with Super Auto Eject Deluxe Cover(s)**  
**in Bar Graph** 091-55-234-XXX and **Digital Display**  
 091-55-194-XXX

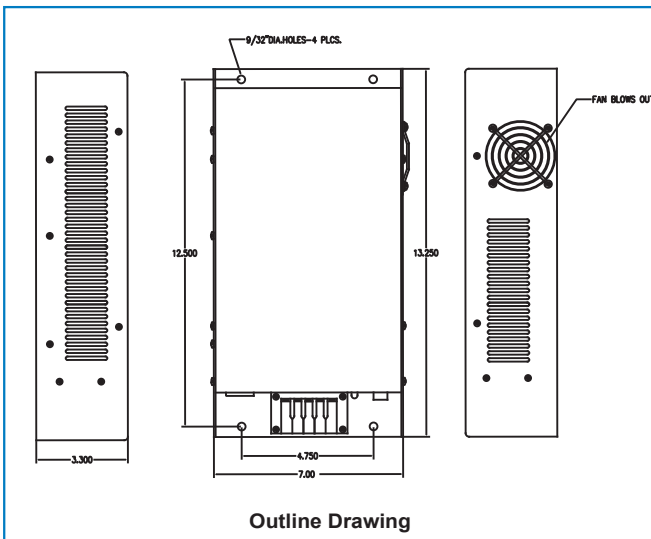

Part Number	Description	Electrical Data		Dimensions			Wgt.
		AC Volts	AC Amps	L	W	D	
091-187-12-REMOTE	Auto Charge 1200, REMOTE	120	5	13.25"	6.8"	3.3"	7 lbs

Rev. A. 07-11-18