

# AUTO CHARGE® 3

## LOW COST - LIGHT LOAD DUAL SYSTEM BATTERY CHARGER



**MODEL # 091-26-12**

The Auto Charge 3 is a completely Automatic Battery Conditioner designed to mount on the vehicle to recharge and maintain the batteries of the vehicle. Two independent charging circuits control the two outputs. The batteries are then each automatically charged and maintained fully charged while still being completely isolated from each other. A maximum output of 3 amperes permits maintaining the batteries in vehicles without parasitic loads. This charger is ideal for vehicles with small batteries and no parasitic loads.

### SPECIFICATIONS:

**Input:** 120 Vac, 50/60 Hz, 1 Amp Max

**Input Fuse:** 1.5 Amps, Slo Blo

**Output:** 12 Vdc, 3 Amps

**Output Fuse (Recommended):** 6 Amps

**Charge Indicator:** Red and Green LED

**Weight:** 5 lbs

**Warranty:** 3 Years



ENERGIZED AND READY, WHEN SECONDS COUNT

**3 AMPS FOR CHARGING VEHICLE BATTERIES**

**AUTOMATICALLY CHARGES DUAL BANKS OF BATTERIES**

**CANNOT OVER CHARGE BATTERY**

**DUAL OUTPUT - 2 BATTERY VEHICLES**

**CURRENT LIMITED, CAN NOT BE OVERLOADED BY DEEP DISCHARGED BATTERIES OR VEHICLE STARTING**


**3 YEAR WARRANTY**

### OPTIONAL INDICATOR



Model IN-2

Remote LED Indicator to show when the charger is Ready or Charging

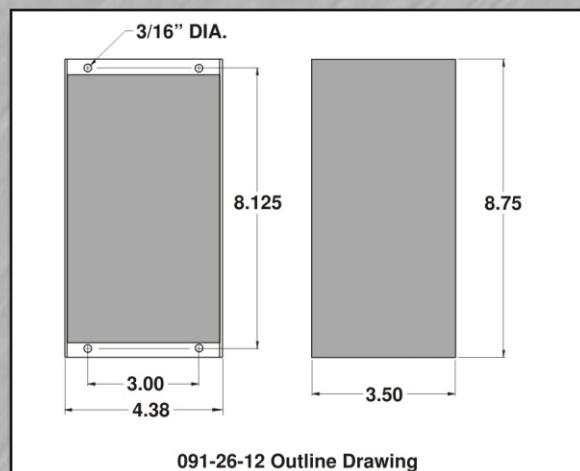

091-26-12 Outline Drawing