


Dual Port USB-C & USB-A NGR

Dual USB-C & USB-A Charging Port, 12/24V

Features

- Quick and easy way to recharge electronic devices in a vehicle
- 63 watt max output allows charging of two devices at the same time USB-C 45watts / USB-A 18watts max.
- Built-In LED Indicator indicates device is powered
- Designed for easy installation in vehicle switch panels
- Reverse polarity protected
- Can be connected to 12 or 24V switched ignition or directly to battery

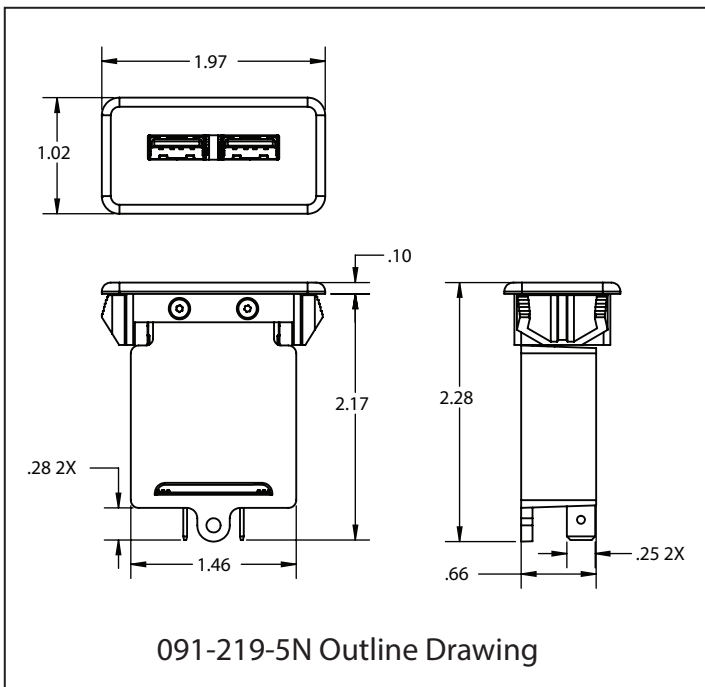

Specifications: USB Dual Port

Input Voltage: 10 to 30 VDC
(10 to 32 VDC absolute min./max.)

Input Current: 6 Amps max at 12.0 VDC
(with 63 Watt load)

Output Voltage: USB-A 3.6 to 12 VDC
USB-C 3.3 to 21VDC

Output Current: 6 Amps (maximum)

Indicator: Device Powered Blue LED
Ambient Temp: (12v) -20C to 70C
(24v) -20C to 55C

Warranty: 3 years

Part Number	Description	Electrical Data		Dimensions				Wgt.
		DC input	Watts	L	W	D	Corner	
091-264-N	Dual USB Charging Port NGR	10 to 30 VDC	63 max	1.97"	1.02"	2.17"	-	.1 lb

DS_091-264N-revA 6-9-2020