


AUTO CHARGE® 4000

NEW LOW PROFILE DUAL OUTPUT CHARGER

Features

- NEW - Low Profile 45 amps for charging vehicle batteries
- Designed for vehicles with dual battery system
- Output voltage regulated
- NEW - Accommodates Lead-Acid, Gelled Electrolyte, AGM, and Odyssey® battery types
- Auxiliary 15 amp output circuit with AC/DC selector switch for operating accessory loads: air compressor pumps, hand lights or hand-held radios
- Power "ON" LED indicator
- System Status indicator
- Internal cooling fan

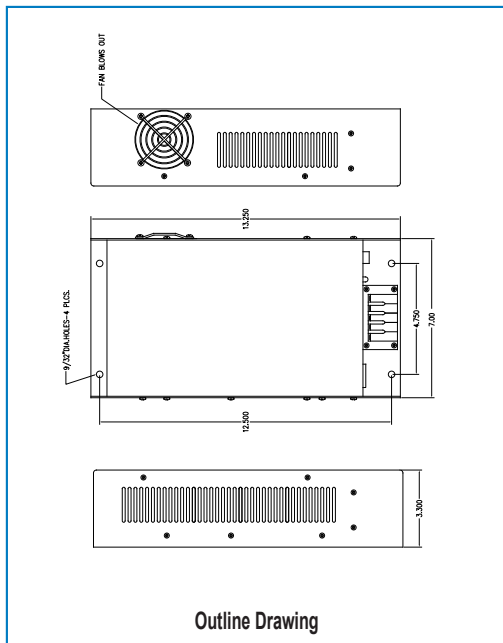

Specifications:

- Input Power:** 120 Volts AC, 50/60 Hz, 6 Amps
- Input Fuse:** 8A, Fast Blow
- Output Power (Bat):** 12 Volts DC, 45 amps max.
- Output Fuse (Recommended):** 60 Amps
- Length:** 3.3"
- Width:** 6.8"
- Height:** 13.25"
- Weight:** 7 lbs
- Warranty:** 3 years

Remote Display Options:
Standard Indicator 091-39-IND

Part Number	Description	Electrical Data				Dimensions			Wgt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	D	
091-89-12	Auto Charge 4000	12	45	120	6	3.3"	6.8"	13.25"	7 lbs

Rev. A. 09-25-18