

Toll Free: 1-877-761-3001



**LANCIER**  
Hydraulik

USA Inc.

[www.lancier-hydraulik.com](http://www.lancier-hydraulik.com)

# Cutters

# *performance Line*



***... when it gets tough !***


# Cutters



**Type LH-CU-100**



Integrated bolt cutter

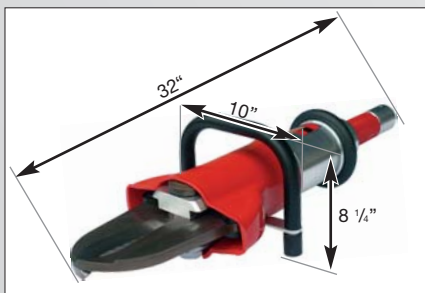

Opening width	10"
Cutting force max.	238,500 lbs
Length	32"
Width	10"
Height	8 1/4"
Weight	40 lbs
<b>Order-No.*</b>	<b>76130</b>


**Performance factor 59.63**  
**Power/Weight ratio 59625.2**

\* All specifications refer to operating pressure of 10,440 PSI, without hoses.





## Type LH-CU-70

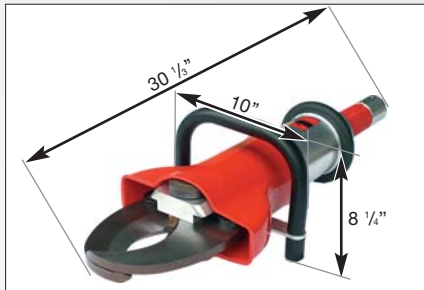

**Performance factor 46.6**  
**Power/Weight ratio 6657.7**

Opening width	7"
Cutting force max.	248,000 lbs
Length	30 1/8"
Width	10"
Height	8 1/4"
Weight	37 1/4 lbs

**Order-No.\* 76120**




## Type LH-CU-55



**Performance factor 22.47**  
**Power/Weight ratio 4085.4**


Opening width	5 1/2"
Cutting force max.	90,900 lbs
Length	24 1/4"
Width	7 1/2"
Height	7"
Weight	22 1/4 lbs

**Order-No.\* 68610**

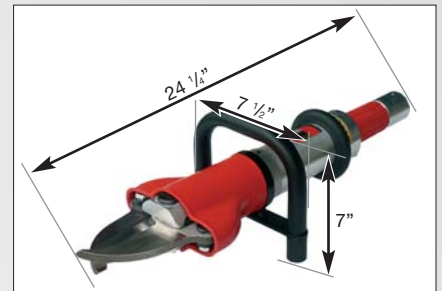

## Type LH-CU-40



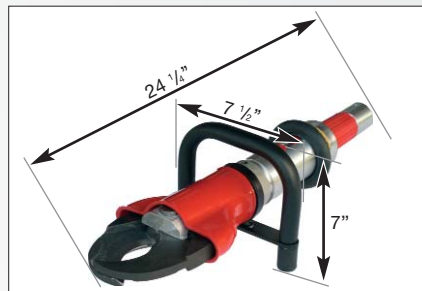







**Performance factor 15.96**  
**Power/Weight ratio 3991.3**



Opening width	4"
Cutting force max.	91,800 lbs
Length	24"
Width	7 1/2"
Height	7"
Weight	23 lbs

**Order-No.\* 17984**

### Special features

-  **Opening widths up to 10"**
-  **Cutting force up to 248,000 lbs**
-  Operating pressure 9,135 to 10,440 PSI
-  High pressure pigtails, 20" long, equipped with kink protection
-  Automatic locking, flat face quick connect couplings
-  Optional with **Monocoupling**
-  Twist grip safety control with integrated over pressurization protection
-  Ergonomic handle, non slip, extremely handy
-  Exchangeable and regrindable blades
-  Optimum power/weight ratio



**LANCIER**  
Hydraulik

# Cutters

## Type LH-CU-13



LANCIER Hydraulik's pedal cutter LH-CU-134 is equipped with a single hand twist-grip-safety control. In conjunction with its serrated, non-slip blades it represents the optimum rescue tool for restricted areas.

Opening width	1 1/8"
Cutting force max.	32,400 lbs
Length	12 3/8"
Width	3 1/8"
Height	4 1/2"
Weight	9 lbs
<b>Order-No.*</b>	<b>67800</b>

# Accessories

## Replacement blades



The regrindable blades must be replaced in pairs.

Type 100	<b>Order-No.</b>	<b>67468</b>
Type 70	<b>Order-No.</b>	<b>51456</b>
Type 55	<b>Order-No.</b>	<b>68632</b>

Type 40	<b>Order-No.</b>	<b>41459</b>
Type 34 movable	<b>Order-No.</b>	<b>67805</b>
Type 34 fix	<b>Order-No.</b>	<b>67806</b>

## Upgrade sets



Cutters LH-CU-40 and LH-CU-70 can be easily upgraded to the next sized type by the exchange of determined components.

Upgrade set LH-CU-40 to LH-CU-55	<b>Order-No.</b>	<b>69279</b>
----------------------------------	------------------	--------------

Upgrade set LH-CU-70 to LH-CU-100	<b>Order-No.</b>	<b>67522</b>
-----------------------------------	------------------	--------------

## Monocoupling



All of LANCIER Hydraulik's rescue tools can be equipped with monocouplings.

- Secure coupling of both lines in one action
- Coupling under pending pressure
- 360° freely rotatable: reduces stress to high pressure hoses

<b>Order-No. Nipple</b>	<b>73994</b>
<b>Order-No. Socket</b>	<b>73993</b>

Your qualified LANCIER Hydraulik partner

\* All specifications refer to operating pressure of 10,440 PSI, without hoses. Subject to alterations, errors excepted.