


Foam Equipment for Service Stations

FIRE DETECTION AND EXTINGUISHING SYSTEM is appropriate for protecting service stations from the pouring of flammable liquid. The system is designed to prevent vehicle-refuelling areas from fuel spillage. The vertical tank is made of stainless steel.

Characteristics

- It detects and extinguishes fire automatically in its initial stage.
- It allows activation of the electrical manual release.
- It allows incorporating selector valves to protect several pumps with only one tank of extinguishing agent.
- Automatic failure signal in the detection system.
- It allows switching on alarms, switching off pumps, etc.

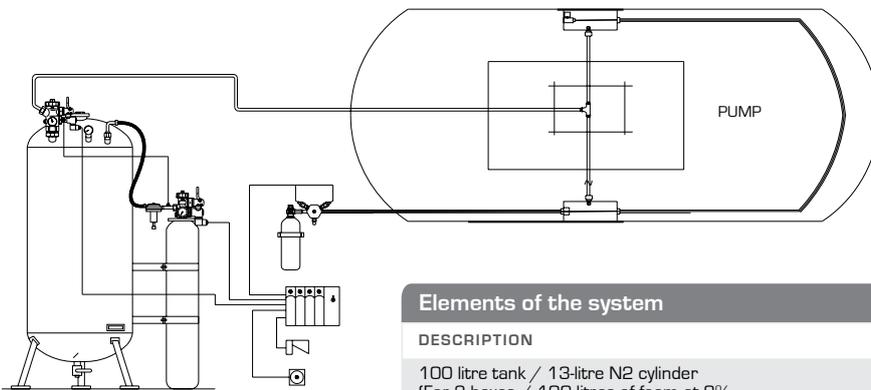

Elements of the system

DESCRIPTION	P. NUMBER
100 litre tank / 13-litre N2 cylinder (For 2 boxes / 100 litres of foam at 8%)	606KD117
250 litre tank / 30-litre N2 cylinder (For 4 boxes / 200 litres of foam at 8%)	606KD300
100 litre tank controller (One per tank without selector valve)	606KIT74
250 litre tank controller (One per tank without selector valve)	606KIT75
Manifold ø 1 1/2" for two selector valves	36544002
Manifold ø 1 1/2" for three selector valves	36544003
Manifold ø 1 1/2" for four selector valves	36544004
Manifold ø 2 1/2" for two selector valves	36544005
Manifold ø 2 1/2" for three selector valves	36544006
Manifold ø 2 1/2" for four selector valves	36544007
LPG-145 selector set (as required, min. 2)	606KIT14
Joint Nut 1 1/2" M-H (one per tank of 100 l). (With two or more selector valves)	606KIT73
Joint Nut 2 1/2" M-H (one per tank of 250 l). (With two or more selector valves)	30830125
Buffer N2 of 3 litres LPG-60 with pressure switch (1 per risk)	606KIT41
Initial Box with nozzle (as required)	606KIT31
Final Box with nozzle and Pressure Gauge (as required)	606KIT30
Medium Box with nozzle (as required)	606KIT32
Connection accessories set 2 boxes (1 per set of 2 boxes)	606KIT34
Connection accessories set 4 boxes (1 per set of 4 boxes)	606KIT48
4 x 6 Copper pipe (as many metres as distance from tank to pump, Max. 25 m.)	30804060
WIRSBO 25 mm pipe (as many metres as distance from tank to pump, Max. 25 m.)	606KIT08
Control Module de control (Max. 3 selector valves per module)	606KIT35
Manual release button with protective box (1 per risk)	606KIT51
SK-07 Alarm Siren (1 per system)	60460631