



# **AUTO CHARGE 3**

## LOW COST LIGHT LOAD DUAL BATTERY CHARGER


- Charge indicator lights indicate charging and ready
- Provision for optional remote charge indicator
- Current limited, cannot be overloaded by deep discharged batteries or vehicle starting
- Maintains complete isolation of the two batteries

The Auto Charge 3 is a completely Automatic Battery Conditioner designed to mount on the vehicle to recharge and maintain the batteries of the vehicle. Two independent charging circuits control the two outputs. The batteries are then each automatically charged and maintained fully charged while still being completely isolated from each other. A maximum output of 3 amperes permits maintaining the batteries in vehicles without parasitic loads. This charger is ideal for vehicles with small batteries and no parasitic loads.

### Specifications:

#### **Outline Drawing:**

- Input: 115v or 230v a.c., 50/60 Hz
- **Output:** 3A @ 13.25v d.c.
- Weight: 3.7kg

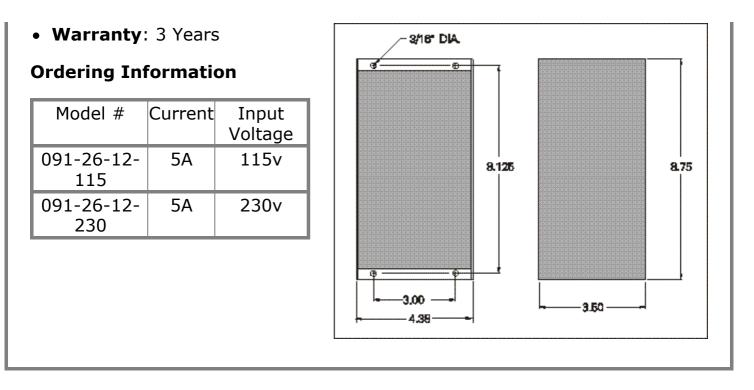

## Ludo McGurk Transport Equipment Ltd.

Unit 11, Deanway Trading Estate, Wilmslow, Cheshire, SK9 3HW, Great Britain E-Mail: <u>ludo@ludomcgurk.co.uk</u> Phone: (+44) 01625 527673, Fax: (+44) 01625 549929

Home | Auto Electrical | Marine Electrical