




Engineered
Quality

drainage pump K 2 F

Flat suction pump



Förderhöhe H m (WS)

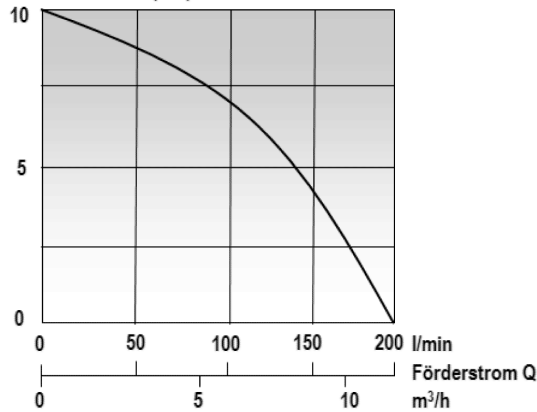

RANGE OF USE

Flat drainage pump especially for residual water.
Dry-running safe.

temperature of medium to be pumped max: 45 °C

pH value min: 5

pH value max: 8

TECHNICAL SPECIFICATIONS

Engine: 1 ~ 230 V AC

engine power P1: 0.7 kW

Rated current: 3.3 A

weight: 7 kg

Height H (max.): 11 m

Rate Q (max.): 200 l/min

companion dimensions: G 1.25"

connecting bend: H 07 RN-F 3G1,0 (10 m)

connecting plug: Schuko IP 44

Delivery rate Q l/min	200	170	130	90	0
Delivery height H m (WC)	0	3	5	7	11

SPECIFICS

MATERIALS

crankcase: Stainless steel 1.4301

pump body: PP fibre-glass reinforced 30 %

base plate: stainless steel 1.4301

rotor shaft: Stainless steel 1.4021

blade wheel: Polyacetat POM

screws: Stainless steel A2

seals: Perbunan NBR

: Triple shaft, Perbunan NBR