


# • NOHA MODEL 20

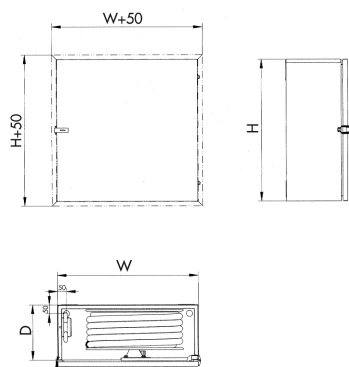

## NOHA FIRE HOSE REEL AND CABINET WITH INSULATION AND HEATING FOR WALL-MOUNTING OUTDOORS OR IN CORROSIVE ENVIRONMENTS

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The stainless steel cabinet is equipped with insulation and a thermostatically controlled heating element and will withstand temperatures down to -35°C (measured in zero wind) without the water freezing.

For use outdoors and in corrosive environments, for instance in marinas, on campgrounds and in parking garages.

### NOHA MODEL 20 IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- The cabinet is made of stainless steel, lined with 20 mm of insulation
- Door fitted with rubber gasket and hinges on right hand side
- One throw-over door catch
- 200W/230V thermostatically controlled heating element
- Cabinet powder coated RAL 3001 red gloss 70
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions

Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
20	20		795 x 795 x 300	560094
20	25		795 x 795 x 300	560095
20	30		795 x 795 x 300	560096
20		20	795 x 795 x 300	560097
20		25	795 x 795 x 300	560098
20		30	795 x 795 x 300	560099

### OPTIONS

- Red hose

