


• NOHA MODEL 32

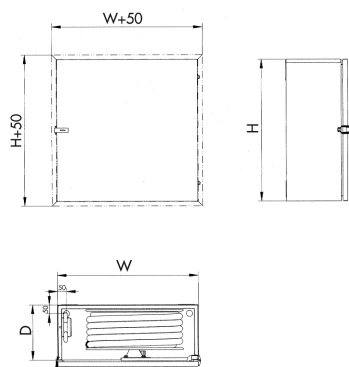

NOHA FIRE HOSE REEL AND CABINET WITH INSULATION AND HEATING FOR WALL-MOUNTING OR RECESS-MOUNTING IN COLD ROOMS

Hose reel mounted behind the door on a swivel plate which swings 180°. The reel can easily be removed to facilitate the installation. The cabinet is equipped with insulation and a thermostatically controlled heating element and will withstand temperatures down to -35°C (measured in zero wind) without the water freezing.

For use in cold rooms with temperatures below freezing point. Is unsuitable for installation outdoors or in corrosive environments. Parking garages are considered corrosive environments.

NOHA MODEL 32 IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- The cabinet is made of steel, lined with 20 mm of insulation
- Door fitted with rubber gasket and hinges on right hand side
- One throw-over door catch
- 200W/230V thermostatically controlled heating element
- Ø35 mm knockouts for inlet pipework on 2 sides
- Cabinet powder coated RAL 9010 white gloss 15
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions

Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
32	20		795 x 795 x 230	560112
32	25		795 x 795 x 230	560113
32	30		795 x 795 x 230	560114
32		20	795 x 795 x 265	560115
32		25	795 x 795 x 265	560116
32		30	795 x 795 x 265	560117
Trim frame for recess-mounting			795 x 795	555204

OPTIONS

- Cabinet RAL 3001 red
- Hinges on left hand side
- Red hose

