



SAUDI FACTORY FOR FIRE EQUIPMENT

FIRE HOSES & COUPLINGS






FIRE HOSES &

SYNTEX SERIES

FIRE FIGHTING HOSE (TWO LAYERS) - SINGLE JACKET

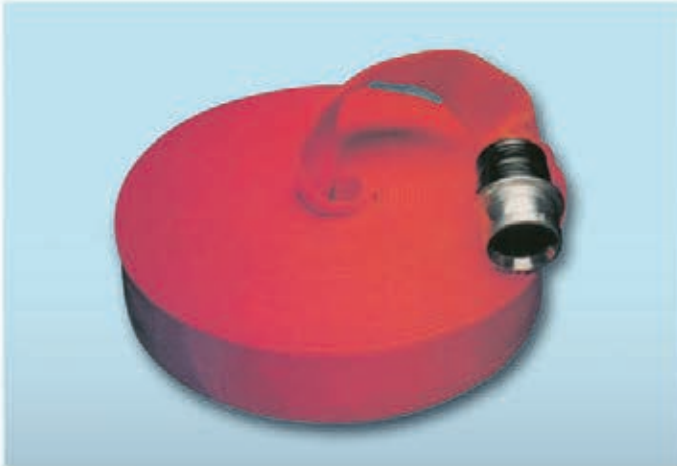

Features:

- Manufactured according to BS 6391.
- Outside: Synthetic woven textile reinforcement.
- Inside: High tensile synthetic rubber.
(Optional: material of P.U.)
- Maintenance free: Do not need drying.
- Unaffected by Mildew.
- Rot-proof.
- Abrasion resistance due to synthetic coating.
- Excellent resistance to ozone.

Model	Diameter, Inch	Working Pressure	Burst Pressure
SYNTEX 40	1½, 2, 2½	10 Bar	40 Bar
SYNTEX 50	1½, 2, 2½	14 Bar	50 Bar
SYNTEX 60	1½, 2, 2½	17 Bar	50 Bar

Colours Available : White, Red

Standard lengths : 23 M (75 Ft.),
30M (100Ft.),
60M (200 Ft.)
(Other lengths available upon request)

Applicable Standards: BS 6391 Type 1, Din 14811

DOUBLE SYNTEX SERIES

FIRE FIGHTING HOSE (THREE LAYERS) - DOUBLE JACKET



Features:

- 100% Polyester double jacket synthetic rubber lined.
- Specially designed for applications where abrasion resistance and high pressure are required.
- Made from high tensile strength 100% virgin polyester yarns in both the warp and weft, hence extra durability.
- Long lasting and never need drying.
- Inner jacket twill weave.
- Outer jacket plain weave.

Model	Diameter, Inch	Working Pressure	Burst Pressure
D. SYNTEX. W	1½ - 2½	15 Bar	60 Bar
D. SYNTEX. P*	1½ - 2½	15 Bar	60 Bar

Colours Available: White, Red (uncoated)
Yellow / Red (with Polyurethane Coating) are
available on special requirement

Standard Lengths: 23M (75 Ft.), 30M (100Ft.), 60M (200 Ft.)
(Other lengths available upon request)

COUPLINGS



DURALEX SERIES

THE HIGH PERFORMANCE, TOP QUALITY FIRE FIGHTING HOSE



Multi Purpose Applications:

- Suitable for extreme applications
- Fire Brigades
- Industrial Purposes
- Building Industry
- Agriculture
- Pumps

Model	Diameter, Inch	Working Pressure	Burst Pressure
DURALEX	1 - 4	17 Bar	45-50 Bar

Features:

- Fire hose of BS 6391 type 3 Standard
- All-in-one construction made of synthetic rubber with textile reinforcement locked in (Optional: material of PVC)
- Resistant to :

Kinking	Ozone
Ultra-violet	Weather
Heat	De-lamination
- Hard-wearing resistance to abrasion, oil and chemicals
- Maintenance free : No drying required, easy for cleaning
- Highly flexible and light weight
- Internal lining is high quality synthetic rubber. (Optional: material of PVC)
- External cover made of high quality rubber with longitudinal ribs. (Optional: material of PVC)

Colours Available : Red

Standard lengths : 23M (75 Ft.), 30M (100Ft.), 60M (200 Ft.)

Applicable Standards : BS 6391 Type 3, DIN 14811

HOSE FOR FIRE HOSE REEL

- NON COLLAPSIBLE COMPLIES BS EN 694



Construction : Three ply hose with two synthetic rubber layers and a textile reinforcement

Colours : Red, Black

Model	Diameter, Inch	Working Pressure	Burst Pressure
SF 75	3/4 Inch	15 Bar	50 Bar
SF 100	1 Inch	15 Bar	50 Bar

SUCTION HOSE & COUPLINGS



Hose Material : Rubber / PVC


Colour : Black

Length : 10 Ft.

Optional : Special length and diameter of hose available upon request

SUCTION HOSE		COUPLINGS	
Model	Size	Model	Size
SSH 250	2 1/2 Inch	SFC 250	2 1/2 Inch
SSH 300	3 Inch	SFC 300	3 Inch
SSH 400	4 Inch	SFC 400	4 Inch
SSH 600	6 Inch	SFC 600	6 Inch

DELIVERY HOSE COUPLINGS - INSTANTANEOUS WITH SERRATED TAILS

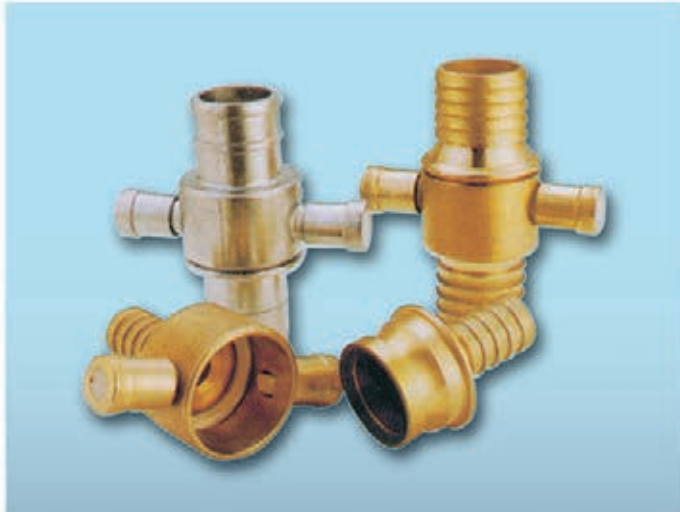

Features:

- The instantaneous system designed to BS336
- The extensive range of couplings is available in standard sizes of 1 1/2 & 2 1/2 Inches and also in a variety of sizes according to the requirement
- In addition to standard Aluminium alloy, couplings made of Bronze, Gun Metal and Chrome plated on any of the above, is also available upon request

* Specify A/AL for Aluminium Alloy
 B for Bronze
 GM for Gun Metal

Model NO.	Nomical Size	Material
SFWR 110*	1 1/2 Inch	Aliminium Alloy/
SFWR 079*	2 1/2 Inch	Bronze/Gunmetal

SPECIAL COUPLINGS, ADAPTORS AND BLANK CAPS



Sl.No	Description	Model No.	Nominal Size
1	Storz - Serrated Tail	SFSZ 150*	1 1/2, 2 1/2 Inch
2	Storz - Female Thread Adaptor	SFSZ 200*	1 1/2, 2 1/2 Inch
3	NH American System Couplings (NST)	SFAS 300*	1 1/2, 2 1/2 Inch
4	Instantaneous Adptor (Double Male)	SFMIS 008*	65mm (2 1/2 Inch)
5	Female Instantaneous - Female Screw Thread Adaptor (NST or BSP)	SFHYD 068*	65mm (2 1/2 Inch)
6	Male Instantaneous - Male Screw Thread Adaptor	SFMIS 009*	65mm (2 1/2 Inch)
7	Female Instantaneous - Male Screw Thread Adaptor	SFMIS 010*	65mm (2 1/2 Inch)
8	Male Instantaneous Female screw thread adaptor	SFMIS 011*	65mm (2 1/2 Inch)
9	Female Screw Thread - male Instantaneous Adaptor	SFMIS 222*	100mm Female, 65mm Male
10	Instantaneous Adaptor (Double Female)	SFHYD 083*	65mm (2 1/2 Inch)
11	Male Instantaneous Adaptor - Blank Cap	SFMIS 012*	65mm (2 1/2 Inch)

Optional: Special sizes of the above items is also available upon request
 *Specify : A/AL for Aluminium Alloy. B for Bronze. GM for Gun Metal

In line with our policy of continuous product improvement, we reserve the right to modify specifications without prior notice.

Factory & Head Office - Riyadh

2nd Industrial Area, Al-Kharj Road, Riyadh, KSA
 Wasel: 7275, Code: 14334, Addition Number: 4441
 Tel : +966 11 2650070, Fax: +966 11 2652190
 E-mail: riyadh@sffeco.com.sa

SFFECO GLOBAL Office

JAFZA (South), Dubai, UAE, P.O. Box 261318
 Tel: +971 4 880 9890, Fax: +971 4 880 9822
 E-mail: sales@sffecoglobal.com

Jeddah Branch

Tel : +966 12 670 6009, Fax: +966 12 676 0307
 E-mail: jeddah@sffeco.com.sa

Dammam Branch

Tel : +966 13 8351961, Fax: +966 13 8351968
 E-mail: dammam@sffeco.com.sa

Madinah Branch

Tel : 0148660959, 0148283256, Fax: 0148660969
 E-mail: madinah@sffeco.com.sa

www.SFFECO.com

