RLU-ibac

alu-ibac

Powerful, autonomous mast mounted rolling lighting unit with intelligent battery analyser & charger

BRANDWEER

The Teklite RLU-ibac is a robust portable & rolling lighting unit with optimum light output and lighting endurance. The folding base legs enable the battery weight to provide great stability. Robust all-metal construction. The lamp is a high efficiency sodium, xenon bulb, a balloon with fluo compact bulbs or a light emitting diode (LED). The mast and the lamp may be detached from the base giving compact transportation dimensions.

1

0112

MOBILE, PORTABLE & EMERGENCY LIGHTING

Specifications




Quick clamp socket \emptyset 24 mm for mast attachment of the lamp.



Battery case with built-in intelligent analyser/charger, 110/230 volt AC socket, 12 volt DC outlet, carrying handle and folding base legs, containing a 12 volt 40 Ah maintenance-free rechargeable battery.

Finish : Orange RAL 2004



Push button for battery analysis

GREEN LED : fully charged (80-100%) ORANGE LED : 1/2 charged (40-60%) RED LED : almost empty (20%)

Permanent LED indication during use of the lamp to monitor the battery load.

It is possible to use the lamp during the charging process.






Natural aluminium seamless drawn mast sections with lockable thumb screws.



Mounting the mast on the battery/ charger case is secured with a single thumb screw.



110/230V AC power supply for charging the 40 Ah battery.



Bottom pin for quick and easy fitting of the mast onto the battery/charger case also equipped with rolling wheels for easy rolling.

MOBILE, PORTABLE & EMERGENCY LIGHTING


POWER

Models



Battery/Charger case with mast

Models	Cat. No.	Extended mast height inclusive lamp	Battery/Charger case dimensions	Case weight	Mast weight
RLU-ibac without folding base legs	38320	2,00 m	265(L) x 360(W) x 320(H) mm	21,0 kg	1,5 kg
RLU-ibac with folding base legs	38323	2,50 m	330(L) x 390(W) x 330(H) mm	24,5 kg	2,0 kg

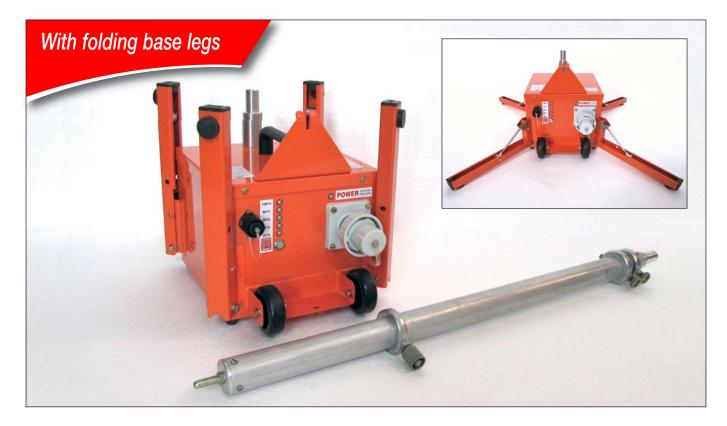


MOBILE, PORTABLE & EMERGENCY LIGHTING

Lamp choice

* Lamp fully adjustable with standard fitted clamping knob.








Model 33/55 Watt 12 Volt SMD-LED*

Single lamp unit with cable on reel and BINDER plug

Cat. No.	Model	Endurance	Volt	Ampere	Lumens
17583/S	70 Watt HP Sodium*	4 hours	12	6,3	6.500
27660	35 Watt Xenon	8 hours	12	3,0	3.500
B31401	60 Watt Balloon Fluo Compact	6 hours	12	5,2	3.600
34495/S	33 Watt SMD-LED*	11 hours	12	3,2	3.300
34496/S	55 Watt SMD-LED*	7 hours	12	5,3	5.500



Model 60 Watt 12 Volt **Fluo Compact**





Model 35 Watt 12 Volt



All details given in this publication are approximate and may be subject to change without notice.

TEKSAM COMPANY NV, Woudstraat 21, 3600 Genk, Belgium Tel: +32 (0)89 38 44 72 Fax: +32 (0)89 38 61 41 E-mail: info@teksamco.com

Website : www.teklite.com

TEKLITE is a division of Teksam Company NV

(ISO 9001:2008)(€

PP 1753/E NV MM 01/01/14