



# GUARDIAN

FIRE EQUIPMENT, INC.  
MIAMI, FL

Ph. 800.327.6584 • Fax 800.827.3869

## DETAIL AND SUBMITTAL SHEET

### 3400 Series - Fire Hose

Project/Location: \_\_\_\_\_

Date: \_\_\_\_\_

Architect/Engineer: \_\_\_\_\_

Qty: \_\_\_\_\_

Contractor: \_\_\_\_\_

Appropriate Selection

#### Rack and Reel Hose - Lightweight, thermo-plastic lined


Use: Interior fire protection

1 1/2" Hose		2 1/2" Hose		Acceptance/Service Test
Model No.	Bowl (coupling no.)	Model No.	Bowl (coupling no.)	
<input type="checkbox"/> 3402	1 11/16" (3480)	<input type="checkbox"/> 3404	2 11/16" (3485)	500/250 PSI
Hose Length: <input type="checkbox"/> 50' <input type="checkbox"/> 75' <input type="checkbox"/> 100'		Hose Length: <input type="checkbox"/> 50' <input type="checkbox"/> 75' <input type="checkbox"/> 100'		

Select:  Coupled - Brass  Coupled - Aluminum  Uncoupled

Threads:  NST  Other \_\_\_\_\_

Options:  -UL UL Label  -FM FM Stencil

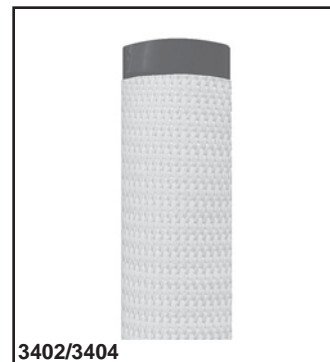

3402/3404

#### Industrial Single Jacket Hose - Single jacket, EPDM rubber lined


Use: Interior/exterior fire protection and washdown

1 1/2" Hose		2 1/2" Hose		Acceptance/Service Test
Model No.	Bowl (coupling no.)	Model No.	Bowl (coupling no.)	
<input type="checkbox"/> 3412	1 3/16" (3482)	<input type="checkbox"/> 3414	2 3/16" (3486)	300/150 PSI
<input type="checkbox"/> 3422	1 3/16" (3482)	<input type="checkbox"/> 3424	2 3/16" (3486)	500/250 PSI
<input type="checkbox"/> 3432	1 3/16" (3482)	<input type="checkbox"/> 3434	2 3/16" (3486)	600/300 PSI
Hose Length: <input type="checkbox"/> 50' <input type="checkbox"/> 75' <input type="checkbox"/> 100'		Hose Length: <input type="checkbox"/> 50' <input type="checkbox"/> 75' <input type="checkbox"/> 100'		

Select:  Coupled - Brass  Coupled - Aluminum  Uncoupled

Threads:  NST  Other \_\_\_\_\_

Options:  -FM FM Stencil  -UL UL Label  -HY Hypalon impreg jacket  -NP for Neoprene lining

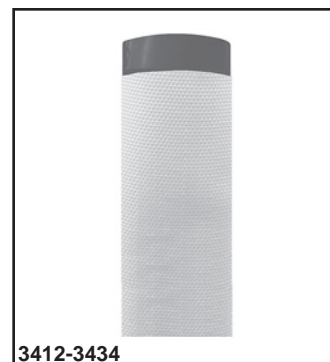

3412-3434

#### Industrial Double Jacket Hose - Double jacket, EPDM rubber line

Use: Interior/exterior fire protection and washdown

1 1/2" Hose		2 1/2" Hose		Acceptance/Service Test
Model No.	Bowl (coupling no.)	Model No.	Bowl (coupling no.)	
<input type="checkbox"/> 3442	1 5/16" (3483)	<input type="checkbox"/> 3444	3" (3487)	600/300 PSI
<input type="checkbox"/> 3452	1 5/16" (3483)	<input type="checkbox"/> 3454	3" (3487)	800/400 PSI
Hose Length: <input type="checkbox"/> 50' <input type="checkbox"/> 75' <input type="checkbox"/> 100'		Hose Length: <input type="checkbox"/> 50' <input type="checkbox"/> 75' <input type="checkbox"/> 100'		

Select:  Coupled - Brass  Coupled - Aluminum  Uncoupled

Threads:  NST  Other \_\_\_\_\_

Options:  -FM FM Stencil  -UL UL Label  -HY Hypalon impreg jacket  -NP for Neoprene lining



3442-3454


#### Industrial Nitrile/Rubber Covered Hose - Extruded thru-the-weave construction

Use: Interior/exterior fire protection and washdown

1 1/2" Hose		2 1/2" Hose		Acceptance/Service Test
Model No.	Bowl (coupling no.)	Model No.	Bowl (coupling no.)	
<input type="checkbox"/> 3462	1 11/16" (3480)	<input type="checkbox"/> 3464	2 11/16" (3485)	300/150 PSI
<input type="checkbox"/> 3472	1 3/16" (3482)	<input type="checkbox"/> 3474	2 3/16" (3486)	500/250 PSI
Hose Length: <input type="checkbox"/> 50' <input type="checkbox"/> 75' <input type="checkbox"/> 100'		Hose Length: <input type="checkbox"/> 50' <input type="checkbox"/> 75' <input type="checkbox"/> 100'		

Select:  Coupled - Brass  Coupled - Aluminum  Uncoupled

Threads:  NST  Other \_\_\_\_\_

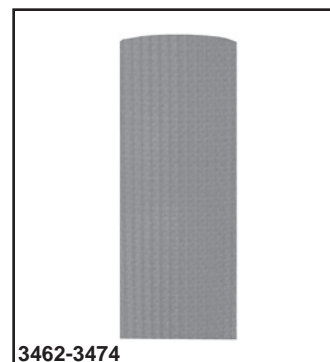

3462-3474