

TECHN. DATEN (TECHNICAL DATA):

NENNDRUCK (NOMINAL PRESSURE) P_N 70 MPa (700bar)
 PRÜFDRUCK (TEST PRESSURE) P_p 84 MPa (840bar)
 GEWICHT (WEIGHT) 4,3 kg
 (INKL. 0,3m SCHLÄUCHE U. KUPPLUNGEN; INCL. 0,3m HOSES AND COUPLINGS)
 ÖLBEDARF (REQUIRED OIL VOLUME) 0,02 l

STEUERUNG (SAFETY FEATURES)

SICHERHEITSSCHALTUNG ENTSPRECHEND EN 13204
 (WHEN CONTROL KNOBS IN NEUTRAL POSITION,
 OIL CIRCULATES WITHOUT EXERTING PRESSURE)

Schneidklasse (CUTTING CLASS):

EN 13204 AC-50-B-4
 NFPA 1936 A4/B3/C2/D4/E3

MAX. SCHNEIDKRAFT (CUTTING FORCE) 163 kN (17t)

BETRIEBSMEDIUM (OPERATING MEDIUM):


2833395: MINERALOIL
 1068202: WASSERGLYKOL (HFC)



FARBE GELB, SCHERE ÖFFNET
 YELLOW, CUTTING TOOL
 OPENS

FARBE WEISS, SCHERE SCHLIESST
 WHITE, CUTTING TOOL CLOSSES

Hydr. Schläuche mit Knickschutz,
 Länge 300mm, Farbe SCHWARZ
 PAIR OF HOSES WITH PROTECTIVE AGAINST
 BUCKLING. LENGHT 300mm, BLACK

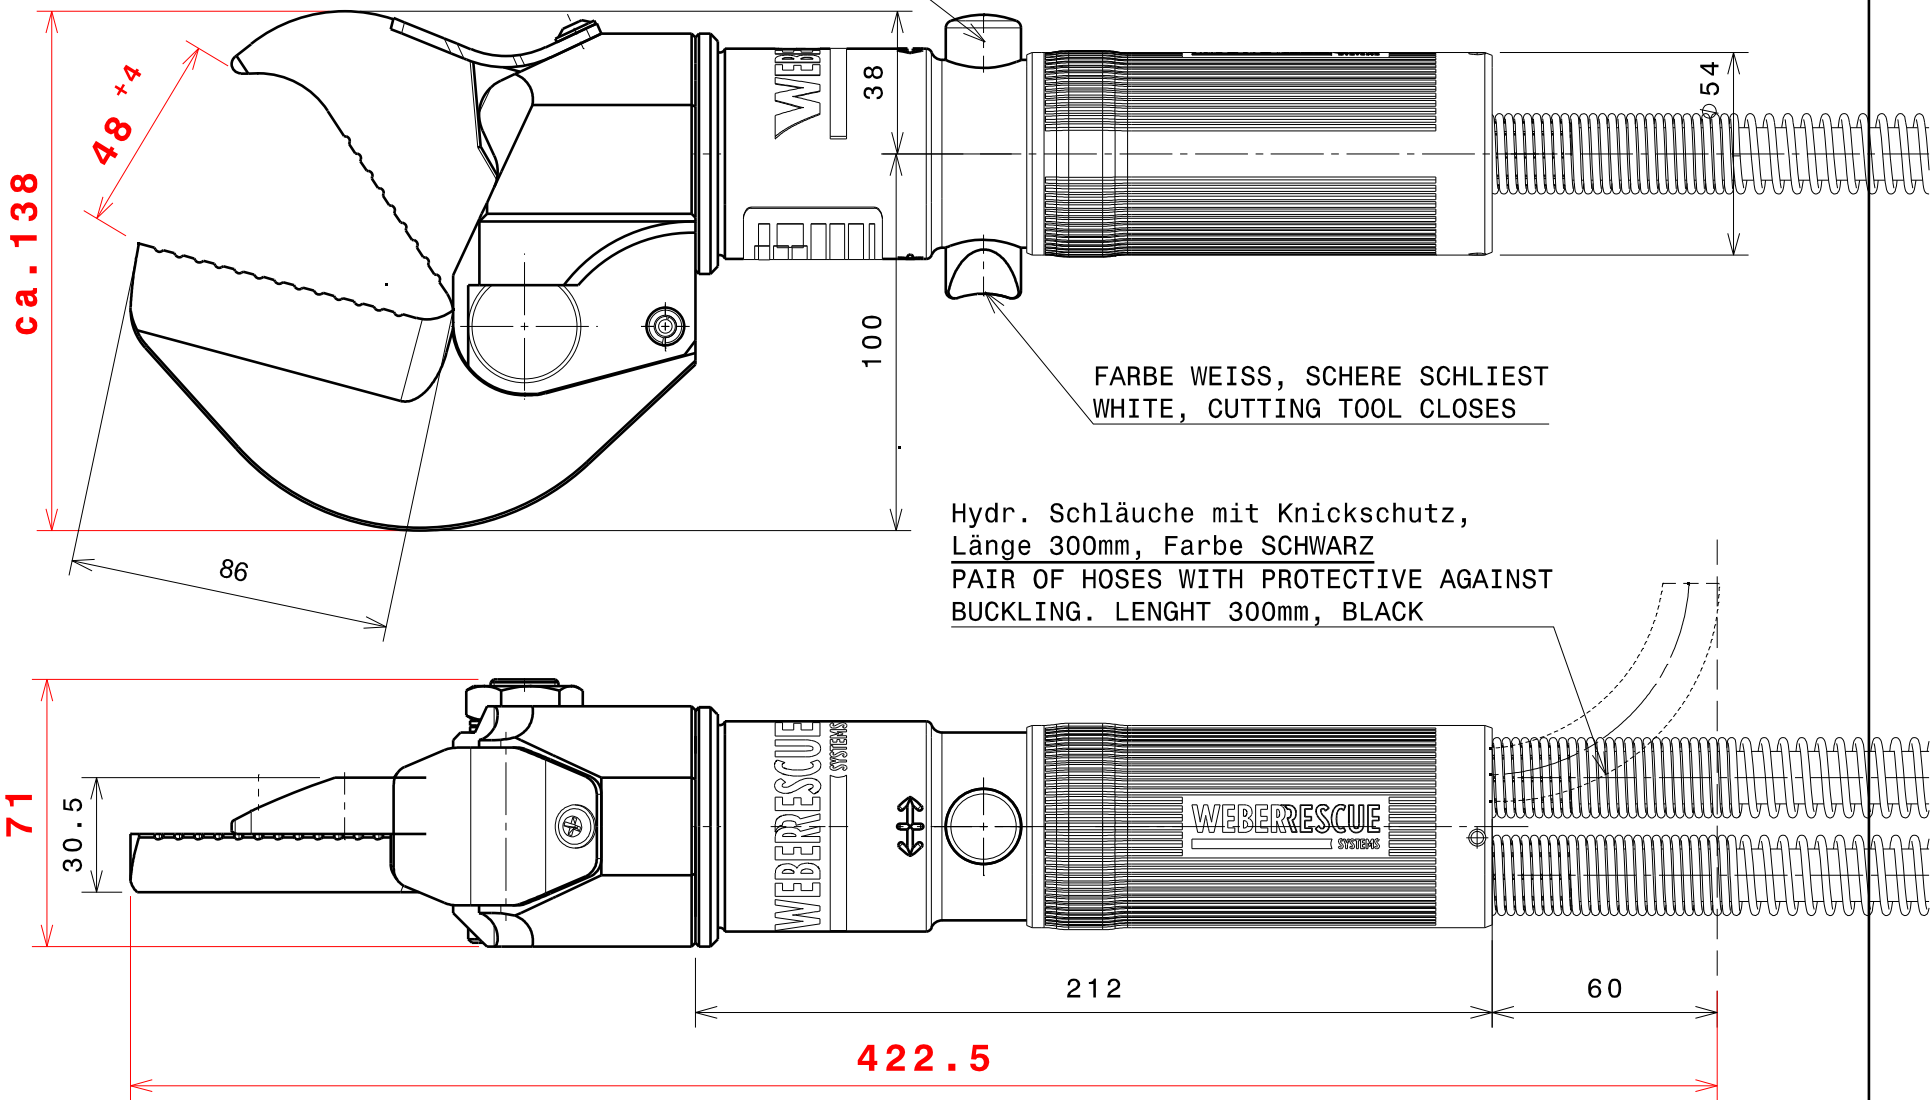

GEPR. JSC
 CHECK.
 GEZ. KST
 DRAW.
 DAT. 24.11.05
 DAT.
 KST
 17.01.14
 GEÄND.
 MODIF.
 AEND.-DATUM
 MOD.-DATE
 140036
 D
 AEND.-NR.
 MOD.-NO.
 REVISION
 REVISION

FREIMASSTOLERANZEN (GENERAL TOLERANCES)	LAENGENMASS (LENGHT)mm TOLERANZ (TOLERANCE)mm	...50 ±1,5	50...250 ± 2,0	250...1000 ± 3,0	1000... ± 5,0	WINKELMASS (ANGLE) TOLERANZ (TOLERANCE)	...180° ±10°
--	--	---------------	-------------------	---------------------	------------------	--	-----------------