

# Mixed blade Hydraulic Cutters

▼ Mixed blade Hydraulic Cutters CHM 205 CX / 275 CX / 2050 CX / 2750 CX



Optimised cutters  
for cutting  
automobile  
profiles.

## DESCRIPTION


High resistant light alloy unit with anti-wear treatment.  
Can be used in an aquatic zone.

Tool comprises of :

- 1 Double acting cylinder.
- 1 Ergonomically shaped operating handle with a built in safety feature.
- Automatic locking mono coupling with flat faced pre-centering cone and metallic protection cap
- 2 straight and curved high resistant forged steel blades with anti-corrosion treatment.
- 1 U type holding handle.

## OPTION :

- Pressure relief tap .
- Adjustable carrying handle

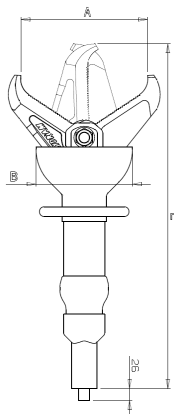

## CHARACTERISTICS

| Model                        | CHM 205 CX    | CHM 275 CX     | CHM 2050 CX   | CHM2750 CX     |
|------------------------------|---------------|----------------|---------------|----------------|
| Operating pressure           | 700 bar       | 700 bar        | 700 bar       | 700 bar        |
| Cutting force                | 694 kN        | 694 kN         | 950 kN        | 950 kN         |
| Depth of cut                 | 175 mm        | 154 mm         | 175 mm        | 154 mm         |
| Maximum opening A            | 205 mm        | 276 mm         | 205 mm        | 276 mm         |
| Dimensions (mm)              | 764x224x177   | 769x249x202    | 774x224x177   | 781x249x202    |
| Weight                       | 14,9 kg       | 13,28 kg       | 16.9 kg       | 15,58 kg       |
| Tool classification EN 13204 | CC 205-H/14,9 | CC 130-H/13,28 | CC 205-H/16.9 | CC 130-H/15,58 |

Powerful, Lightweight and Reliable in Rescue Operations