



## Capacitive Sensors Series 40 - NAMUR EN 60947-5-6



Housing M 32 x 1.5

- For use in areas with the risk of gas explosion, zone 0
- Housing material: PA / PPO
- Sensing distance 3...15 mm adjustable

Certificate:



DMT 03 ATEX E 048	IECEx BVS 07.0031
Ex II 1G Ex ia IIC T1-T6 Ga	Ex ia IIC T1-T6 Ga





### Technical data

Flush mountable

Operating distance $S_n$	12 mm
Operating distance min. / max. adjustable	3...15 mm
Electrical version	2-wire DC
Output function	NAMUR DIN 60947-5-6
<b>Type</b>	<b>KAS-40-30-N-M32</b>
<b>Art. No.</b>	<b>401 700</b>
Operating voltage ( $U_B$ )	5 - 15 V DC, $U_i = 15$ V DC
Output current active surface free	< typ. 1.5 mA
Output current active surface covered	> typ. 2.5 mA
Self-inductance (L)	0.2 mH
Self-capacitance (C)	250 nF
Permitted residual ripple max.	5 %
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-20...+70 °C
LED-display	Yellow
Degree of protection IEC 60529	IP 67*
Connection cable	2 m, PUR, 2 x 0.75 mm <sup>2</sup>
Housing material	PA / PPO
Active surface	PA / PPO
Lid	PA / PPO

<b>Accessories</b> (is delivered with the unit)	2 pieces nuts M 32
---	--------------------

\* With sealed potentiometer screw

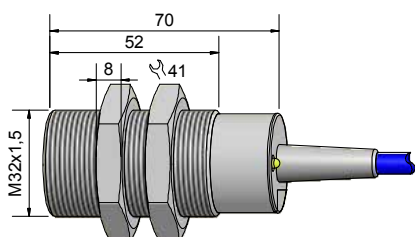

**Made in Germany**

All specifications are subject to change without notice. (06/2014)