



Response behaviour of the UniVario WMX5000 at different increases in temperature

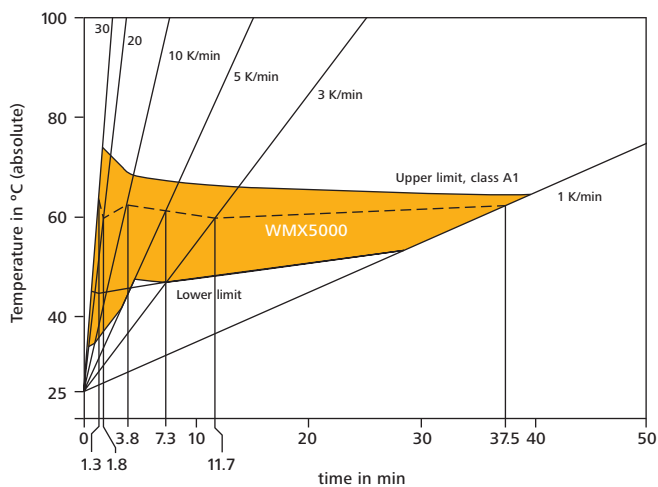

■ Stipulated alarm range according to EN 54-5 class A1

--- WMX5000 response behaviour

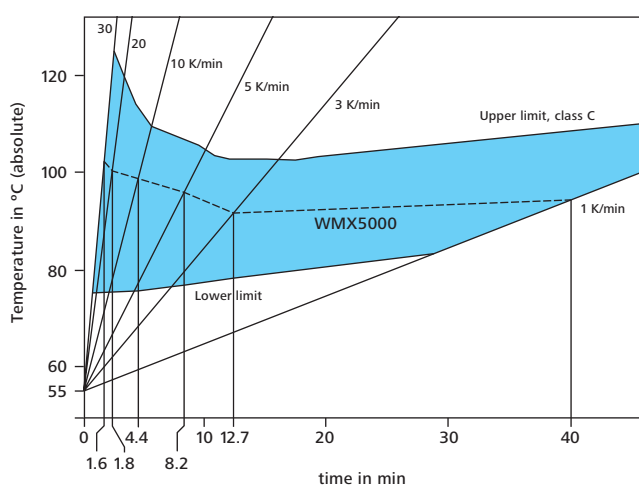

■ Stipulated alarm range according to EN 54-5 class C

--- WMX5000 response behaviour

- ▶ The UniVario WMX5000 is an innovative, intelligent fire detector which, thanks to its modular concept, can be tailored to meet the unique demands of individual applications based on a uniform platform.
- ▶ As the first heat detector suitable for industrial use, the UniVario WMX5000 can be integrated into an Apollo bus system, thanks to the optional UniVario KMX5000 AP communication module. Individual alarm identification and parameterisation is therefore possible.
- ▶ Online temperature display with base UniVario MX5000 LCD.

- ▶ The large power supply area and an optional module UniVario KMX5000 RK with relay contacts enable the stand-alone mode and application in different danger alarm or control units.
- ▶ Because it requires so little energy, ultra thin cables can be used and many sensors can be placed along one line.
- ▶ Converting from limit mode to ring bus mode can be achieved simply by installation of a communication module – there's no need to switch cables.

- ▶ The threshold temperatures between 0 °C and 90 °C, the response class and differential and statical response can be programmed according to your needs.
- ▶ Accessible connections and a standard clamp simplify installation of all products.
- ▶ A service unit to simplify configuration, diagnosis, function checks and data archiving is available.
- ▶ Analysis of the internal history storage by using the UniVario View service software.

Technical Data

Type	Features	Response threshold	Temperature range of operation	Type of protection	External display	Approval
UniVario WMX5000	Sensor monitored function Alarm/disturbance and function LED	Response classes according to EN 54-5 A1, A2, B, C, D* Indices according to EN 54-5 S, R	-20 °C to +80 °C	IP 67	Can be connected	VdS G207090
UniVario WMX5000 3GD	Optional upgrades: - Communication module - Relay module Can be configured according to your needs Service interface Data storage Power supply 7.6 V to 30 V DC	Adjustable between the alarm temperatures of 0 °C and 90 °C (105 °C*) with service unit				EN 54-5 class A1, A1S, A1R, A2, B, C ATEX zone 2/22 FM approval applied for (3030827)

*Only the WMX5000 with single-hole installation

Subject to technical modifications

Minimax GmbH & Co. KG
Industriestrasse 10/12
23840 Bad Oldesloe
Germany
Tel. +49 4531 803-0
Fax +49 4531 803-248
E-mail info@minimax.de
www.minimax.de

