




## Typical response sensitivities with n-Heptan fires

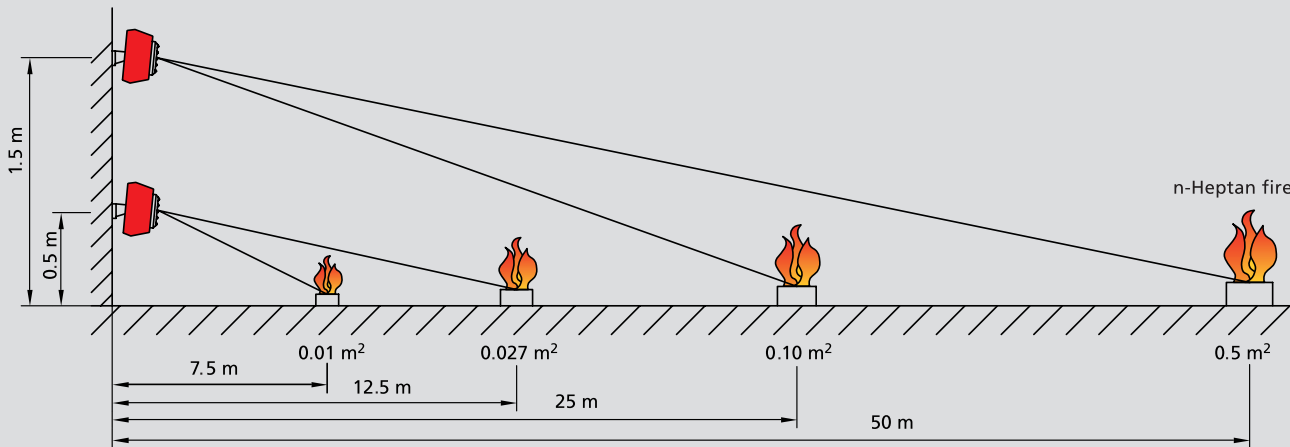

- ▶ As the first flame detector suitable for industrial use, the UniVario FMX5000 UV can be integrated into an Apollo bus system, thanks to the optional UniVario KMX5000 AP communication module. Individual alarm identification and parameterisation is therefore possible.
- ▶ A separate cable connection port makes installation and maintenance particularly easy and inexpensive.
- ▶ The large range of power supply and an optional module with relay contacts enable the stand-alone mode and application in different danger alarm or control units.
- ▶ Because it requires so little energy, ultra thin cables can be used and many sensors can be placed along one line.
- ▶ Converting from limit mode to ring bus mode can be achieved simply by installation of a communication module – there's no need to switch cables.
- ▶ The new, innovative housing design is extremely robust, seawater-resistant and with IP 67 rating. The FMX5000 UV can be utilised very successfully in the most heavy-duty industrial application environments.
- ▶ Modern EMC requirements are far exceeded, due to design measures on the housing and safety-orientated electronics design.
- ▶ Failure signals can be registered at central position via a separate current increasing line.
- ▶ A service device to simplify configuration, diagnosis, function checks and data archiving is available.
- ▶ Analysis of internal history storage by using the UniVarioView service software.

## Technical data

Type	Features	Spectral sensitivity	Temperature range of operation	Type of protection	External display	Approval	Monitoring surface (VdS) rel. to risk m <sup>2</sup>
UniVario FMX5000 UV	Alarm/disturbance and function LED Optional upgrades: – Communication module – Relay module  Can be configured according to your needs Service interface Data storage Power supply 7.6V to 30V DC	185 nm to 260 nm	-20 °C to +80 °C	IP 67	Can be connected	VdS G206132 EN 54-10 class 1 FM 3030815	max. 676 m <sup>2</sup>  Room height max. 45 m

Subject to technical modifications

Minimax GmbH & Co. KG  
 Industriestrasse 10/12  
 23840 Bad Oldesloe  
 Germany  
 Tel. +49 4531 803-0  
 Fax +49 4531 803-248  
 E-mail info@minimax.de  
 www.minimax.de

