


OSF300 OS&Y Resilient Wedge Gate Valve

UL Listed / FM Approved
Flange x Flange

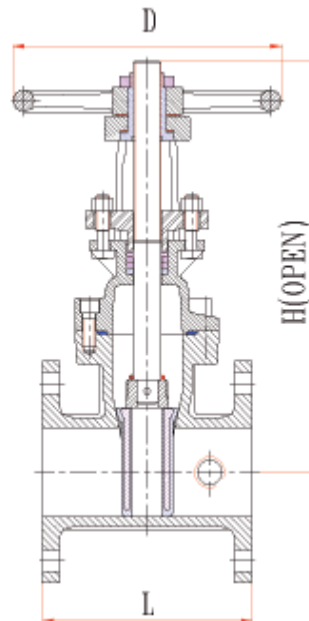

Valve Standard

Comply with AWWA C515 / BS5163

Pressure & Rating

Working Pressure: 20.7 Bar

Temperature: -10 °C to 120 °C

Flange Ends: ANSI B16.1 Class 125, EN1092-2 PN10 / PN16. (Please specify on order).

Fusion Bonded Epoxy Coated Interior and Exterior

Dimensions

Size	65 mm	80 mm	100 mm	125 mm	150 mm	200 mm	250 mm	300 mm
L	191	203	229	254	267	292	356	356
H	415	480	550	655	740	930	1130	1320
D	183	254	254	305	305	356	445	445

Material Specifications

Item	Material	ASTM Spec
Hand Wheel	Ductile Iron	A536 65-45-12
Stem Nut	Bronze	B62
Packing	Graphite	Non-asbestos
Gasket	EPDM	Commercial
Bonnet	Ductile Iron	A536 65-45-12
Stem	Stainless Steel	AISI420
Wedge Nut	Stainless Steel	AISI304
Wedge	Ductile Iron with EPDM Coated	
Body	Ductile Iron	A536 65-45-12

Rapidrop Global

Rutland Business Park, Newark Road, Peterborough, PE1 5WA, United Kingdom
Tel: +44 (0) 1733 847 510 Fax: +44 (0) 1733 553 958
e-mail: rapidrop@rapidrop.com web: www.rapidrop.com