



# Electric ventilators ES & ESV 245

## Easy Pow'Air Technology

### Positioning from 0,90 m to 6 m

- Electric variable speed ventilator for the ESV245 model lower the starting intensity without reducing the performance
- Works on a 5 kVA generator
- Automatic Tilt : Lifting the handle tilts the ventilator automatically to the correct working position.
- Positioning from 0,90 m to 6 m :
  - Effective between 2 to 6 m from the opening
  - Can also be positioned as near as 0,90 m
- Noise : 88.7 dBA at 3m (positioning the ventilator at a further distance reduces the noise level for the user).
- Air Flow : 41500 m<sup>3</sup>/h.
- Compact, stable & Easy to handle : With its large wheels at the back, the ES & ESV 245 are very easy to handle even in very adverse terrain.
- Stronger Turbine : increased security and reduced maintenance
- Can be positioned to the precise angle you need between +10° and +20° (Tilt positioning accessory to ventilate sub-terrain levels).  
The angle above 10° negates problems with stair cases.
- Protective Frame : frame has an epoxy coating.



- Works on 5 kVA compact generator
- Reduced noise level
- Automatic tilt
- Waterproof male plug delivered with the fan



**LEADER**  
Tomorrow's technology today

# CHARACTERISTICS

Modèl	Reference	Characteristics	Speed	Dimensions (mm)	Approximate weight
ES245	I63.10.017	2.2KW 220V 50 Hz Monophasé IP55	2850 rpm	720x720x620	50.5 kg
ESV245	I63.10.015	2.2KW 220V 50 Hz Monophasé IP 55 with variable speed	2850 rpm	720x720x620	53 kg

# ACCESSORIES

5m Duct	I60.20.113	Protective Cover	I60.20.097
Mister Adaptor	I60.20.104	High Expansion Foam Adaptor	I60.20.116
-10° Tilt Positioning Adaptor	I60.20.108		





Easy Pow'Air Technology added to the Turbo-ventilators specific air entrainment effect :

Advantage 1 :  
Effective between 2 to 6 m  
Can also be positioned as near as 0,90 m

Advantage 2 :  
Easy to handle :  
More space between the entrance and the ventilator.

Advantage 3 :  
Ventilate in all circumstances,  
even with raised floors or steps

Advantage 4 :  
Reduced noise level for users due to a  
positioning further away from the entrance.

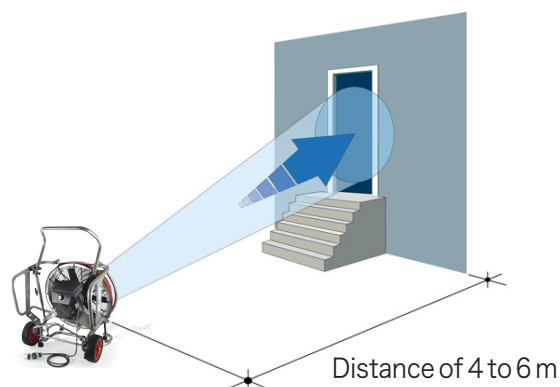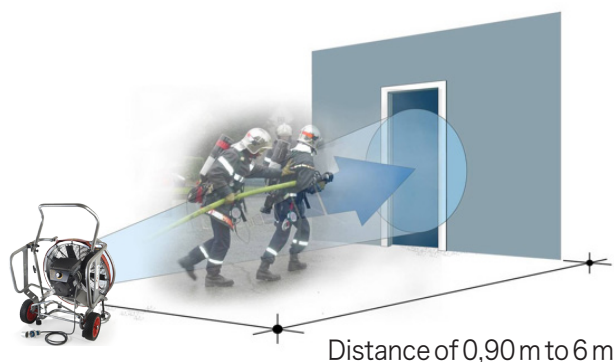

# MAINTENANCE

Reduced maintenance due to its robust conception.  
All the components are easily interchangeable by the user



ZF03.039.EN.2

As it is our policy to constantly seek to improve our products, we reserve the right to change the specification of our equipment without notice.

