



# Petrol driven ventilator MT 225

## Easy Pow'Air Technology

### Compact and Powerful

- Positioning from 0,90 m to 6 m :
  - Effective between 2 to 6 m from the opening
  - Can also be positioned as near as 0,90 m
- Noise : Positioning the ventilator at a further distance reduces the noise level for the user.
- Air Flow : 31 300 m<sup>3</sup>/h (18 400 CFM).
- Can be positioned to the precise angle you need between -10° and +20°.



Lever to adjust the angle of inclination



- Easily stored in the boot of a vehicle
- Tilt between -10° and + 20°
- Light weight

# CHARACTERISTICS

Model	Reference	Engine	Running time At full speed (working inclination)	Dimensions W x H x D (cm)	Weight
MT225	I60.10.054	4HPHONDAGX120-4stroke	1h40	55 x 57 x 44	28.6 kg

# ACCESSORIES

High Expansion Foam Adaptor 1,5 " BSPM	I60.20.105	Mister Adaptor 1 " BSPF	I60.20.137
--	------------	-------------------------	------------





Easy Pow'Air Technology added to the Turbo-ventilators specific air entrainment effect :

Advantage 1 :  
Effective between 2 to 6 m  
Can also be positioned as near as 0,90 m

Advantage 2 :  
Easy to handle :  
More space between the entrance and the ventilator.

Advantage 3 :  
Ventilate in all circumstances,  
even with raised floors or steps

Advantage 4 :  
Reduced noise level for users due to a  
positioning further away from the entrance

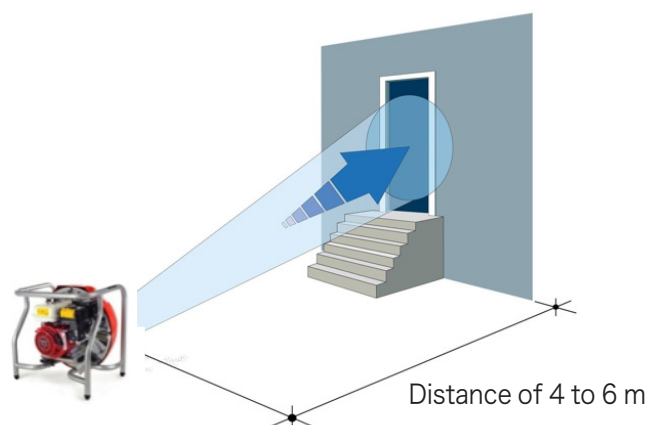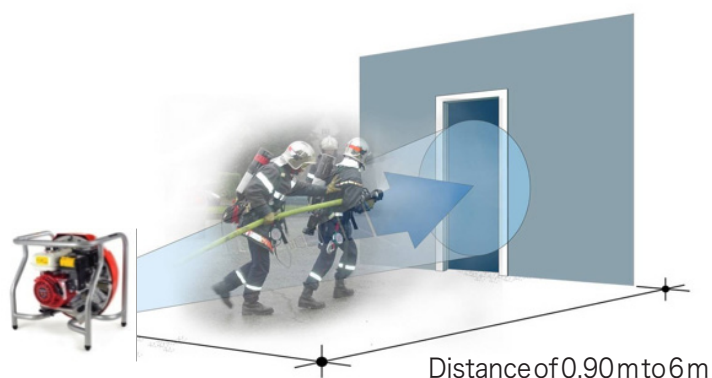

# MAINTENANCE

Reduced maintenance due to its robust conception.  
All the components are easily interchangeable by the user.



MT225-ZF03.125.EN.2

As it is our policy to constantly seek to improve our products, we reserve the right to change the specification of our equipment without notice.

