



# Petrol driven ventilator MT 236 (5,5 HP Honda)

## Easy Pow'Air Technology

### Positioning from 0,90 m to 6 m

New model :

40 min. additional running time  
20% less CO emissions

- Automatic tilt: Lifting the handle tilts the ventilator automatically to the correct working position.
- Positioning from 0,90 m to 6 m :
  - Effective between 2 to 6 m from the opening
  - Can also be positioned as near as 0,90 m
- Noise : 91 dBA at 3m (positioning the ventilator at a further distance reduces the noise level for the user).
- Air Flow : 43 100 m<sup>3</sup>/h.
- Compact, is easily stored in any locker on a fire truck.
- Stable & easy to handle : With its large wheels at the back, the MT236 is very easy to handle even in very adverse terrain.
- Reinforced Turbine.
- Protective Frame : epoxy coating.
- Can be positioned to the precise angle you need between +10° and +20° (Tilt positioning accessory to ventilate sub-terrain levels).  
The angle above 10° negates problems with stair cases.



- Easily stored in the boot of a vehicle
- Automatic tilt



# CHARACTERISTICS

Model	Reference	Characteristics	Runing time At full speed (working inclination)	Dimensions w x h x d (mm)	Weight
MT236	I60.10.052	5.5 HP HONDA GX 160 - 4 strokes	2h10	550x548x492	42 kg

· Oil Alert : Automatic engine cut due to low oil level.

# ACCESSORIES

5m Duct	I60.20.101	Exhaust Pipe Adaptor	I60.20.014
Mister Adaptor	I60.20.104	Exhaust Pipe Extension – length 2.5m	I60.20.012
High Expansion Foam Adaptor	I60.20.105	Protective Cover	I60.20.017
Hourmeter	I60.20.135	- 10° Tilt Positioning Adaptor	I60.20.108





Easy Pow'Air Technology added to the Turbo-ventilators specific air entrainment effect :

Advantage 1 :  
Effective between 2 to 6 m  
Can also be positioned as near as 0,90 m

Advantage 2 :  
Easy to handle :  
More space between the entrance  
and the ventilator.

Advantage 3 :  
Ventilate in all circumstances,  
even with raised floors or steps

Advantage 4 :  
Reduced noise level for users due to a  
positioning further away from the entrance.

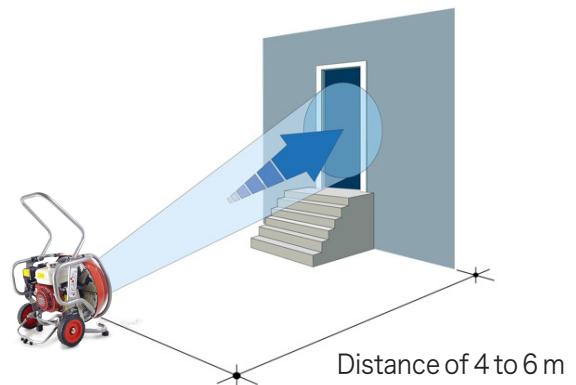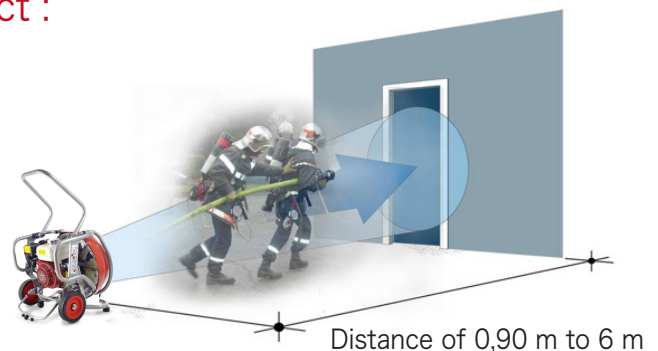

# MAINTENANCE

Reduced maintenance due to its robust conception.  
All the components are easily interchangeable by the user.

**LEADER**  
Tomorrow's technology today



ZF03.118.EN.2  
As it is our policy to constantly seek to improve our products, we reserve the right to change the specification of our equipment without notice.

