



Petrol driven ventilator MT 260

Easy Pow'Air Technology

Positioning from 0,90 m to 6 m

- Automatic tilt: Lifting the handle tilts the ventilator automatically to the correct working position.
- Positioning from 0,90 m to 6 m :
 - Effective between 2 to 6 m from the opening
 - Can also be positioned as near as 0,90 m
- Air Flow : 71 800 m³/h.
- Stable & easy to handle : With its large wheels at the back, the MT260 is very easy to handle even in very adverse terrain.
- Reinforced Turbine.
- Protective Frame : epoxy coating.
- Noise : 96,1 dBA at 3m (positioning the ventilator at a further distance reduces the noise level for the user).
- Can be positioned to the precise angle you need between +10° and +20° (Tilt positioning accessory to ventilate sub-terrain levels).
The angle above 10° negates problems with stair cases.



- Air Flow : 71 800 m³/h.
- Automatic tilt



CHARACTERISTICS

Model	Reference	Characteristics	Runing time At full speed (working inclination)	Dimensions w x h x d (cm)	Weight
MT260	I60.10.044	9 HP Vanguard - 4 strokes	2h00	72 x 72 x 63	65 kg

ACCESSORIES

5m Duct	I60.20.113	Exhaust Pipe Extension – length 2.5m	I60.20.012
Mister Adaptor 1" BSP F	I60.20.104	Protective Cover	I60.20.097
High Expansion Foam Adaptor	I60.20.116	-10° Tilt Positioning Adaptor	I60.20.108
Hour meter	I60.20.135	Exhaust Pipe Adaptor	I60.20.014





Easy Pow'Air Technology added to the Turbo-ventilators specific air entrainment effect :

Advantage 1 :
Effective between 2 to 6 m
Can also be positioned as near as 0,90 m

Advantage 2 :
Easy to handle :
More space between the entrance
and the ventilator.

Advantage 3 :
Ventilate in all circumstances,
even with raised floors or steps

Advantage 4 :
Reduced noise level for users due to a
positioning further away from the entrance.

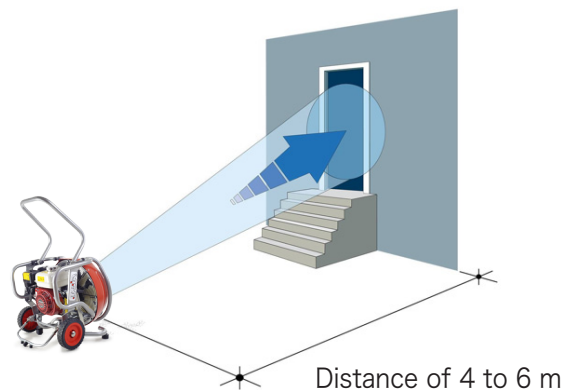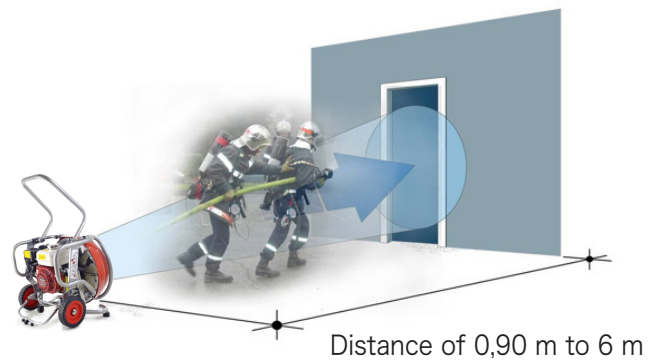

MAINTENANCE

Reduced maintenance due to its robust conception.
All the components are easily interchangeable by the user.



ZF03.144.EN.2

As it is our policy to constantly seek to improve our products, we reserve the right to change the specification of our equipment without notice.

