

Ammonia

Sensoric NH3 3E 1000



Product Data Sheet

Sensoric NH3 3E 1000

FEATURES

Amperometric 3 electrode sensor cell
Fixed organic gel electrolyte
No CO2 interference
0 volt bias operation

TYPICAL APPLICATIONS

TLV-monitoring, leakage detection
Fixed point applications in cold storages & refrigeration plants only
For other applications please use NH3 3E SE versions
No background concentrations of ammonia & alcohols*

PART NUMBER INFORMATION

SENSORIC CLASSIC	1854-031-03069
CTL 4 series adaptation	1854-031-04049
CTL 7 series adaptation	1854-031-07079

Note:

- Background concentrations of ammonia and alcohols might shorten life time of sensor
- Exposure to high concentrations of alcohols can cause a high loss of sensor sensitivity

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Product Data Sheet

Sensoric NH3 3E 1000

TECHNICAL SPECIFICATIONS

Measuring Range		0–1000 ppm	
Sensitivity Range		6 nA/ppm \pm 3 nA/ppm	
Zero Current at 20 °C		< \pm 40 nA	
Resolution at 20 °C		<15 ppm	
Bias Potential	0 mV		
Linearity		<5% full scale	
Response Time at 20 °C			
t50		<20 s	calculated from 5 min. exposure time
t90		<120 s	calculated from 5 min. exposure time
Long Term Sensitivity Drift		<10% per 6 months	
Operation Conditions			
Temperature Range		-40 °C to +40 °C	
Humidity Range		15–90% r.H., non–condensing	
Effect of Humidity		an abrupt change of r.H. will cause a short term drift of zero reading	
Sensor Life Expectancy		> 18 months in air	
Warranty		12 months	


Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Product Data Sheet

Sensoric NH3 3E 1000

OUTPUT vs. TEMPERATURE:

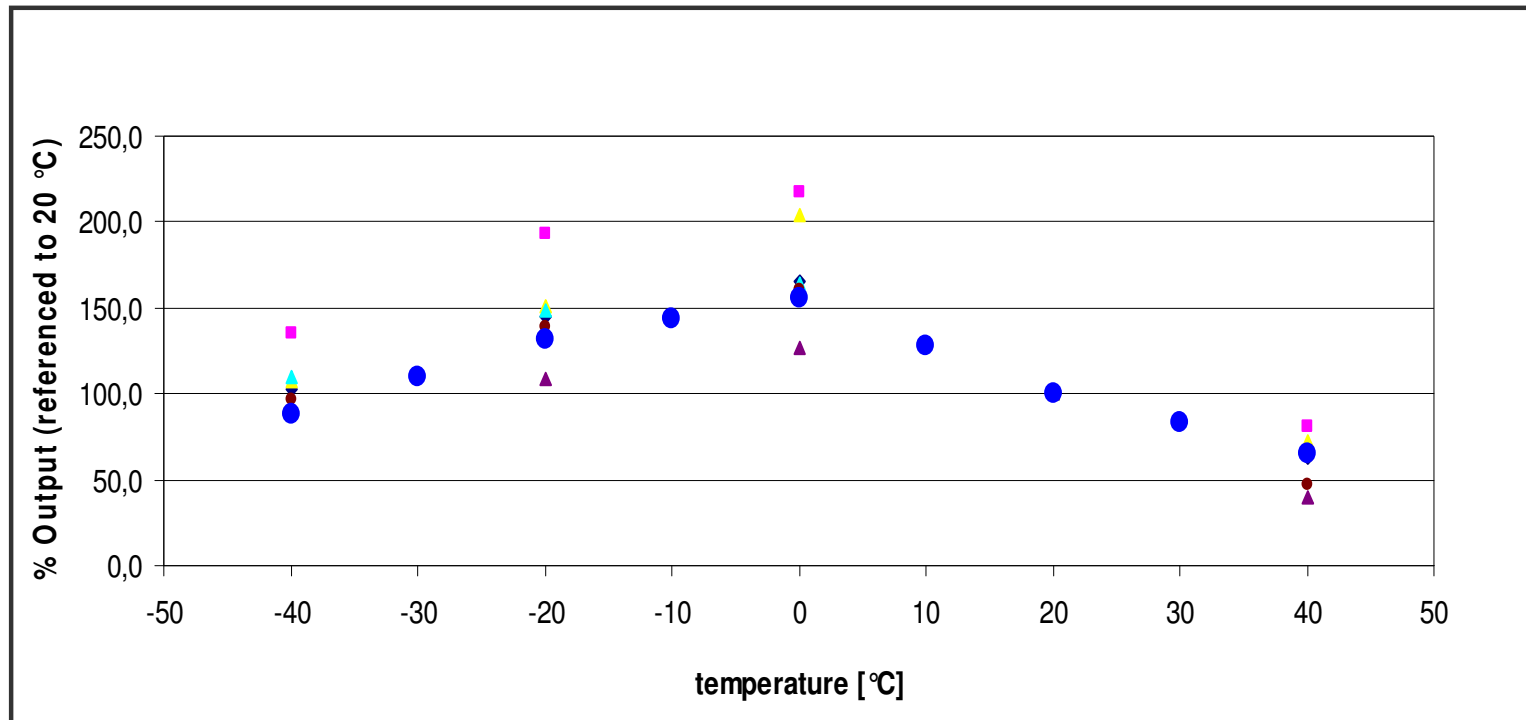


Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Sensoric NH3 3E 1000

ZERO READING vs. TEMPERATURE:

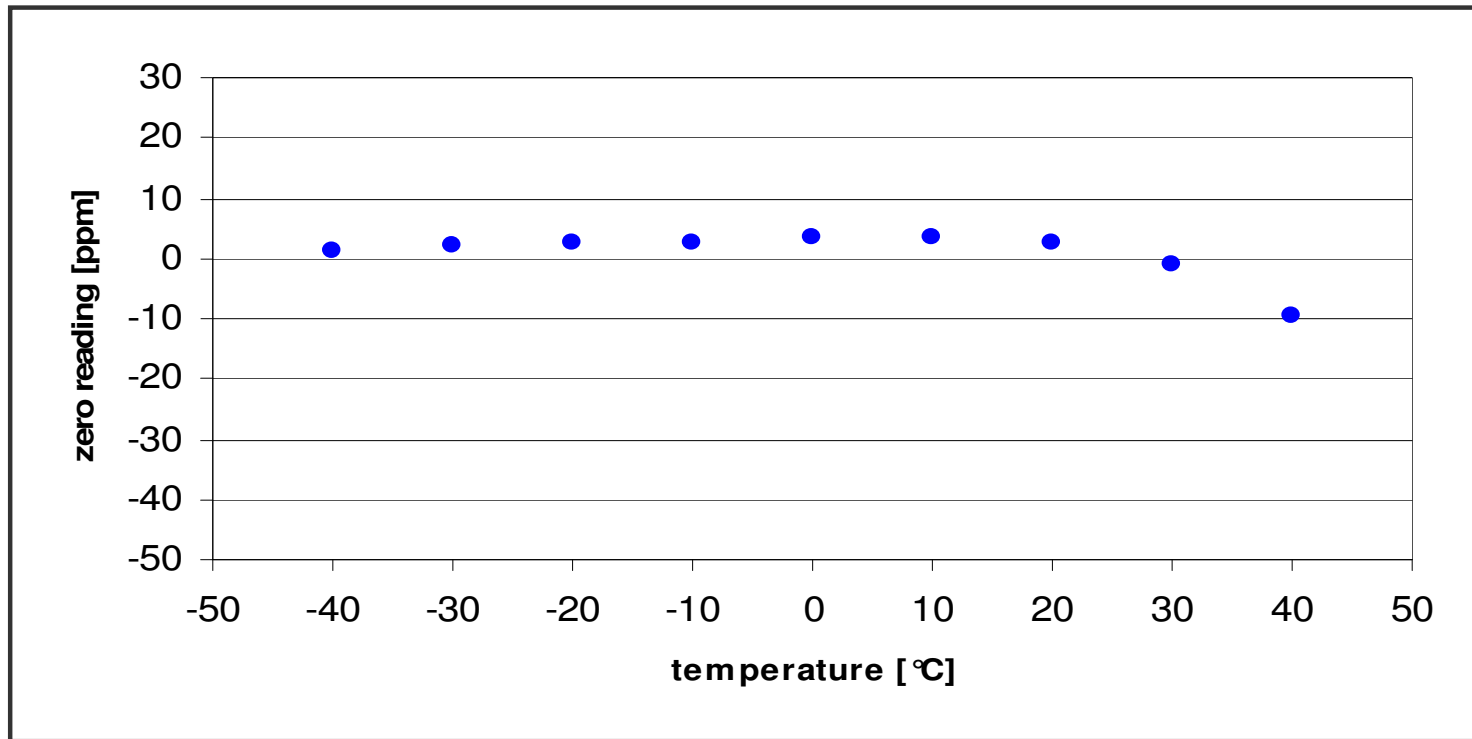

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Product Data Sheet

Sensoric NH3 3E 1000

CROSS SENSITIVITIES AT 20°C

Gas	Concentration	Reading [ppm]
Alcohols	1000 ppm	yes / n.d.
Amines		yes ¹⁾
Arsine	0.2 ppm	0
Carbon Dioxide	5000 ppm	0
Carbon Monoxide	100 ppm	95
Chlorine	5 ppm	0 ²⁾
unsat. Hydrocarbons	% range	yes / n.d.
Hydrogen	3000 ppm	3000
Hydrogen Sulfide	20 ppm	40
Hydrogen Chloride	10 ppm	0
Nitrogen Dioxide	10 ppm	0 ²⁾
Sulfur Dioxide	20 ppm	yes / n.d.

1) Please contact our Technical Marketing Department for more details

2) At higher concentrations, a negative reading can be possible

Notes:

1. Interference factors may differ from sensor to sensor and with life time. It is not advisable to calibrate with interference gases if not otherwise stated
2. This table does not claim to be complete. The sensor might also be sensitive to other gases

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Product Data Sheet

Safety Note

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

Attention

Use of the Sensoric range sensors requires complete understanding of the instructions. Before using Sensoric range sensors please carefully read 'Application Notes' which can be found at www.citytech.com under the heading 'Support' -> 'Application Notes' -> 'Sensoric'

Product Safety Data Sheets (PSDS) can be obtained at www.citytech.com under the heading 'Support' -> 'Product Safety Datasheets'

For further assistance on sensor selection and use, please contact a member of the Technical Sales team.

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

