



# Mastermatic 4500

4500 l/mn Water/AFFF automatic monitor nozzle

## For constant range

- Straight jet, extra strong fog jet.
- Automatic head : Relatively constant range.
- Inlet 2" 1/2 BSP female.




- Optimum reach
- Expansion from 4 to 8 depending on the type of foam compound used
- Materials : anodised aluminium and 'superblack' moulded rubber



# REFERENCES

Model	Reference	Regulated pressure	Flowrate	Special Feature(s)
Mastermatic SP	I12.42.004	7 bar	600-4500 l/min	Manual manoeuvring ring
Mastermatic ER	I12.42.006	7 bar	600-4500 l/min	Electric remote 12-24V
Mastermatic H	I12.42.007	7 bar	600-4500 l/min	Hydraulic remote control

# ACCESSORIES

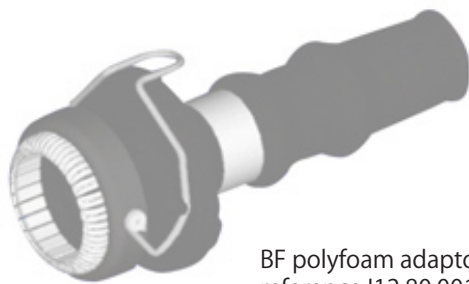


BF polyfoam adaptor  
reference I12.80.001



## REACH CURVES

CURVE	A	B	C	D	E
FLOWRATE IN L/MN	1100	1500	1900	3000	3800
PRESSURE IN BAR	6.7	6.9	7.0	6.9	7.0

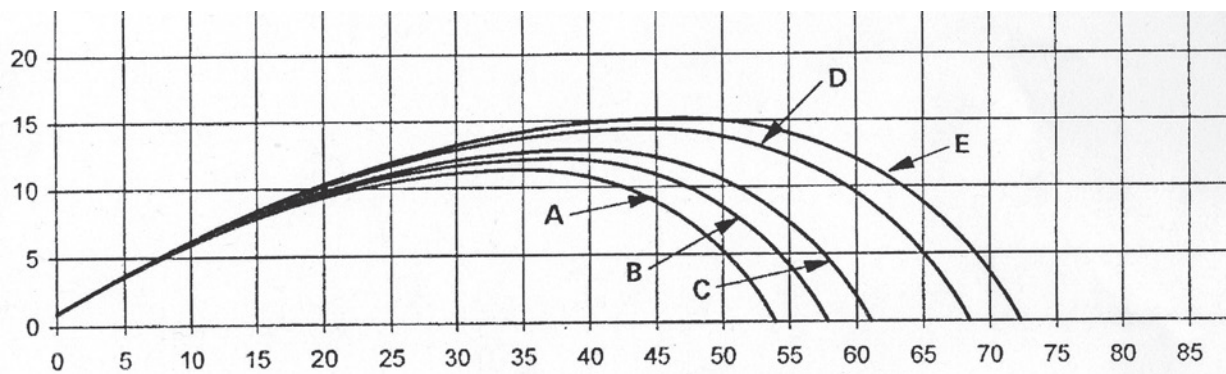

### Test conditions :

- Approximate range of jet at an angle of 30° to the ground, no wind
- Range around 10% less if foam solution is being sprayed



ZF02.026.EN.1

We are constantly seeking to improve our products. Consequently, we reserve the right to change the specifications of our equipment at any moment and without notice.

