





# Halotron I

## Extinguishers

Model	A	B	C	D	F
PHT - 2		34 B			
PHT - 4	5 A	55 B	55 C		
PHT - 6	8 A	70 B	70 C		


### Product description

SFFECO Halotron I extinguishers are the ideal replacement for halon 1211 extinguishers. They are distinguished by their durability, and efficiency. SFFECO halotron I extinguishers are excellent for the general purpose use against fire and environmentally acceptable.

### Features:

- The first halotron extinguisher to receive the Kite Mark and CE mark from the BSI
- Acceptable ozone depletion potential (ODP).
- Acceptable global warming potential (GWP).
- High quality Polyester Powder Coated Paint
- Controlled discharge.
- Brass nickel plated head valve with simple squeeze operation.
- Rechargeable & easy to service.
- Non Corrosive.

**Ideal Use:** General purpose use like in schools, apartments, office, computers, telephone, switchgears, and laboratories

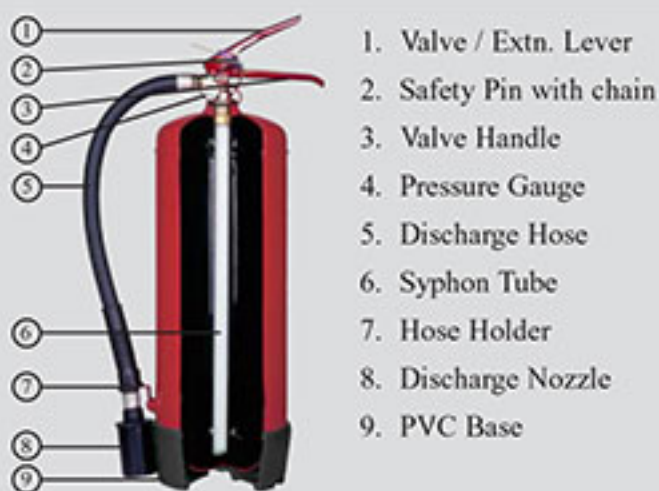

Pressure Gauge With Testing Hole



2Kg Bracket



Wall Bracket



MODEL	PHT - 2	PHT - 4	PHT - 6
Capacity	2 Kg.	4 Kg.	6 Kg
Fire Rating	34 B	5A 55B C	8A 70 B C
Average Discharge Time	11 Sec	9 Sec	12 Sec
Height	385 ± 1.5mm	408 ± 5 mm	520 ± 5
Diameter	110 ± 1 mm	150 ± 2 mm	150 ± 2 mm
Filled Weight	3.80 Kg	7.30 Kg	10.2 Kg
Empty Weight	1.80 Kg	3.30 Kg	4.2 Kg
Operating Temperature	-30° to +60°C	-30° to +60°C	-30° to +60°C
Working Pressure 20°C	14 Bar	14 Bar	14 Bar
Maximum Service Pressure	18 Bar	18 Bar	18 Bar
Test Pressure	30 Bar	30 Bar	30 Bar

