



**WET CHEMICAL
FIRE EXTINGUISHER**
6 LITRE WET CHEMICAL
13A • 75F

REMOVE SAFETY PIN AND
DETACH APPLICATOR
FROM 1 METRE AIM APPLICATOR
AT FIRE AND SQUEEZE LEVER
APPLY ENTIRE CONTENTS TO
TOTAL AREA OF FIRE

APPLY ENTIRE CONTENTS ONTO
FIRE AT LEAST 1 M DISTANCE

CE0086








MODEL 5015

• Responsibility of user
• Read the instructions
• Do not use for fires
• Extinguishers are not
• The fire extinguisher
• If not used
• If not used
• If not used

Wet Chemicals

Extinguishers

Model					
SKF 6	13 A				75 F




Product description

SFFECO wet chemical extinguishers are used for cooking oil / fat fires. The fine spray gives almost immediate flame extinguishment while the wet chemical agent reacts with oil to form a soap-like film to seal the surface of the oil and cool it down to prevent re-ignition.

Features:

- Blend of Potassium Acetate & Citrate Agent capable of fighting class A, F Fire
- Kite Mark Certified to BS 7937:2000
- High Quality Polyester Powder Coated Paint
- Thermoplastic Internal Coating to prevent corrosion
- Fine mist spray to prevent grease splashing
- Nickel Brass Plated Head Valve with simple squeeze operation
- Unique Gauge Testing System
- Unique colour code handle & Base (Optional)
- Rechargeable & easy to service.
- Passed 35KV Electrical Conductivity Test

Ideal Use: Commercial Kitchens in connection with pre engineered Hood System.

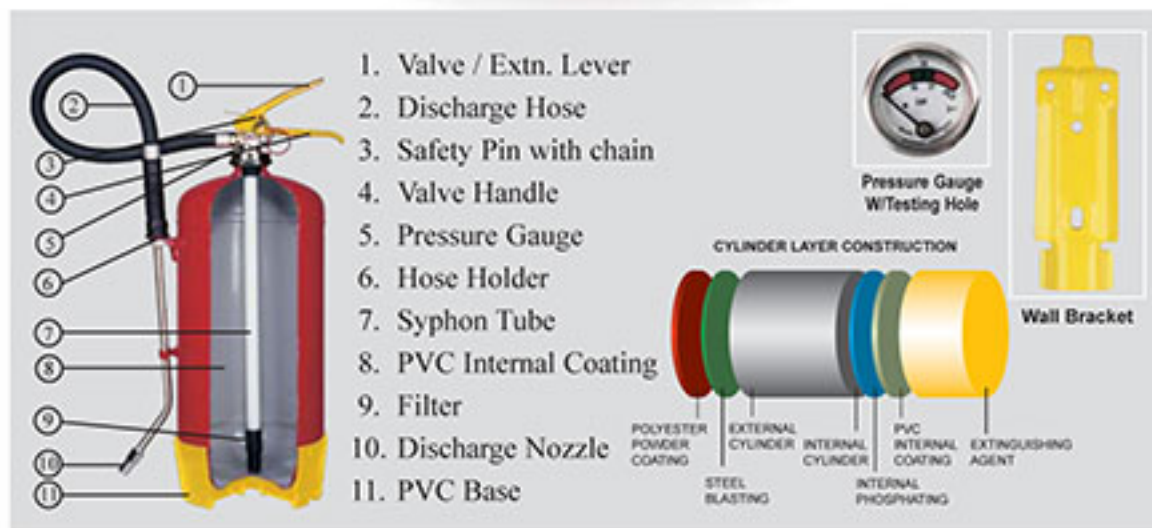

MODEL	SKF 6
Capacity	6 L
Fire Rating	13A 75F
Average discharge time	65 Sec.
Height	500 mm
Diameter	185 mm
Filled weight	11.1 kg.
Empty weight	5.1 kg.
Operating temperature	0°C to +60°C
Working Pressure at 20°C	10 bar
Maximum Service Pressure	11.7 bar
Test Pressure	30 bar

