

# Side Mounted Reels

Series RT


## New Product Announcement

### DESCRIPTION

Reelcraft has modified the popular Series RT, enabling the reel to be mounted on its side, making it ideal for mounting in cabinets and other tight spaces. The standard base is replaced by an equally heavy duty side mount plate. The stainless torsion spring and latch are mounted on the arm for ease of access and to eliminate the possibility of latch out at full extension. The guide arm is easily moved to one of six positions, using only standard tools.

### BENEFITS

- **Safety** Main drive spring completely containerized and permanently sealed
- **Low Maintenance** widened ratchet and latch pawl design greatly reduces wear and increases service life.
- **Corrosion Resistance** Reels feature individual powder coat painting to ensure the highest level of corrosion resistance.
- **Lightweight** Incorporating a composite spool reduces overall weight without sacrificing strength.
- **Ease of Operation** Latch pawl is mounted on guide arm to prevent latch out at full extension and high quality drive spring ensures reel retracts smoothly each and every time.
- **Increased Strength** Ribs are engineered into the guide arm to give added strength and decrease the likelihood of bending due to angular hose pull.

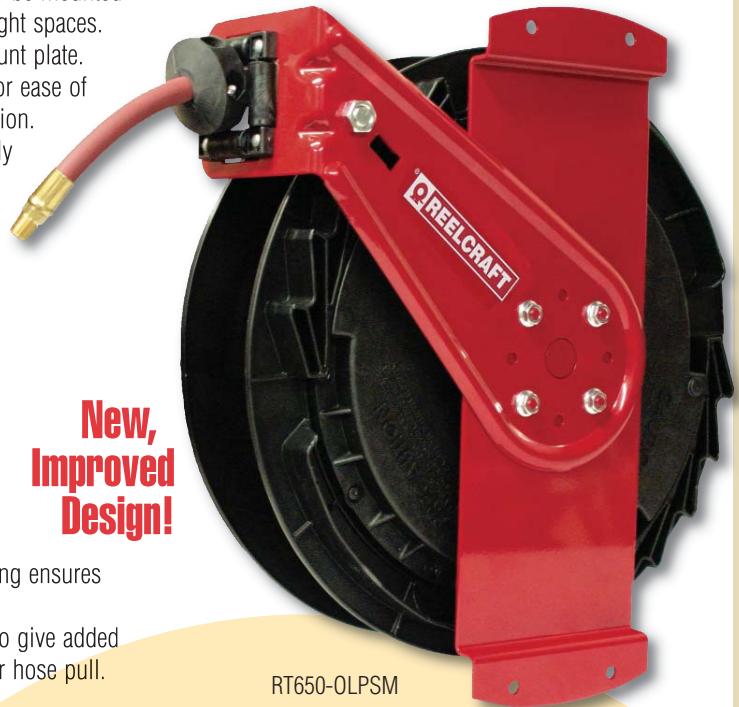

**New,  
Improved  
Design!**

RT650-OLPSM

SERIES RT

SIDE MOUNTED REELS

### DIMENSIONS

Series RT		in / mm	
A	18	457	
B	16 <sup>7</sup> / <sub>16</sub>	418	
C	16 <sup>11</sup> / <sub>16</sub>	424	
D	3 <sup>5</sup> / <sub>16</sub>	85	
E	SEE BELOW		

### SPECIFICATIONS

- ✓ Stainless steel torsion spring
- ✓ Widened ratchet and latch pawl
- ✓ Containerized drive spring
- ✓ Guide arm adjust to 6 different positions
- ✓ High quality hose and rubber bumper stop.
- ✓ Individual powder coat painting on the component level prior to final assembly for maximum corrosion resistance
- ✓ High quality brass hose crimpings

### SPECIFICATIONS

MODEL (with hose)	HOSE I.D. in / mm	HOSE LGTH ft / m	PRESSURE psi / bar	OUTLET in	INLET in	WEIGHT lbs / kg	E in / mm
RT450-OLPSM	1/4 6	50 15	300 21	1/4 (M) NPTF	1/2 (F) NPTF	23 11	6 1/8 156
RT650-OLPSM	3/8 10	50 15	300 21	1/4 (M) NPTF	1/2 (F) NPTF	27 13	7 5/16 186
RT835-OLPSM	1/2 13	35 11	300 21	1/2 (M) NPTF	1/2 (F) NPTF	28 14	7 5/16 186
RT850-OLPSM	1/2 13	50 15	300 21	1/2 (M) NPTF	1/2 (F) NPTF	33 16	8 5/8 219
*RT650-OMPMSM	3/8 10	50 15	1000 69	3/8 (M) NPTF	1/2 (F) NPTF	26 14	7 5/16 186

\*Medium pressure for oil.

Reelcraft Industries is  
**ISO 9001:2000**  
Certified Since 1996

**MADE IN USA**

North America: 800-444-3134  
Europe: +44 (0) 1536 406999  
Pacific Rim: +63 (45) 625-6624  
China: (519) 8512 2391  
Latin America: 002-60-489-1685

### Reelcraft Industries, Inc.

2842 E. Business Highway 30  
Columbia City, IN 46725  
Fax: **260-248-2605**  
www.**reelcraft.com**

