


## SUCTION HOSE

Suction hose following NF S 361 13 and NF EN14557 Standards.

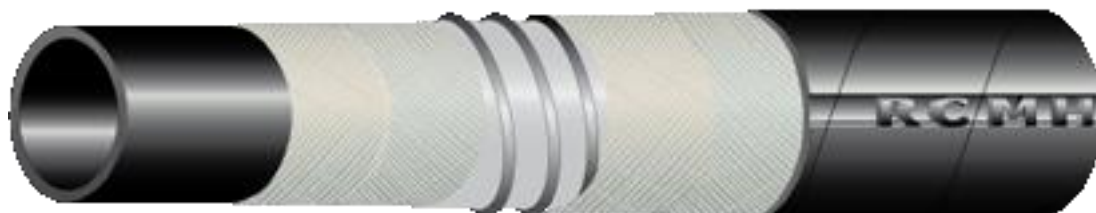

### Technical Features

- ✓ **Vacuum** : 0.9 bar
- ✓ **View** : glad
- ✓ **temperatures** : 90°C maximum
- ✓ **Color** : black
- ✓ **Length** : following requirements

### Composition

- ✓ **Internal lining** : smooth SBR rubber
- ✓ **Enforcement** : 4-lays with metal springs
- ✓ **Outer lining** : SBR rubber, excellent resistance to abrasion and weather

### Applications

- ✓ Due to his extreme robustness, this hose is destined to be used as suction hose for industrial purposes.
- ✓ Thanks to the **4-layer structure** high pressure peaks pose no problem and the hose is also used as pressure hose if a low bending radius is required.
- ✓ His ageing in the water and his abrasion resistance are excellent.

### Color

- ✓ Standard :

Diameter (mm)	Inch	W.P. (bar)	Bending radius (mm)	Weight kg/m
45	1 3/4"	10	320	1.6
70	2 3/4"	10	570	2.8
90	3 1/2"	10	720	4.0
102	4"	10	800	4.8
110	4 1/2"	10	890	5.3
127	5"	10	1100	6.6
152	6"	10	1500	10.0

\*other diameters on request

Suitable couplings : Guillemin, brides, Cam-lock, Storz