


Properties of DuPont™ FE-25™

Chemical Formula	CF ₃ -CHF ₂
Chemical Name	Pentafluoroethane
ASHRAE Designation	HFC-125
Molecular Weight	120.02
Boiling Point	-48.3°C -55°F
Liquid Density @ 25°C @ 77°F	1189.7 kg/m ³ 74.27 lb/ft ³
Vapor Pressure @ 25°C @ 77°F	1381.5 kPa 200.4 psia
Ozone Depletion Potential	Zero
Atmospheric Lifetime	32.6 years

Relative Volume Storage Requirements At Design Concentration Levels for Class A Hazards

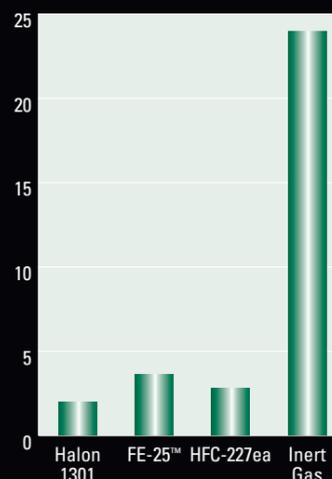

*Other DuPont Clean Agent Fire Extinguishants

FE-36™
FE-36™ is an advanced, zero ozone-depleting replacement for Halon 1211 in streaming applications. It can also be used as a replacement for Halon 1301 in modular suppression systems. Portable fire extinguishers using FE-36™ have been listed by Underwriters Laboratories for use on Class A, B and C fires and are proving to be the standard in-kind replacement for Halon 1211.

FE-13™
FE-13™ is a clean, environmentally acceptable, "people friendly" replacement for Halon 1301 as a total flooding agent under all use conditions. It is particularly applicable where high concentrations are needed for improved safety margins, the protected spaces are large, or where temperatures are likely to go below 0°C (32°F).

FE-227™
FE-227™ is a clean agent fire extinguishant replacement for Halon 1301 with zero ozone-depleting potential. It is used in total flooding applications for the protection of people and high value assets, such as those found in computer rooms, telecommunication facilities, museums, and clean rooms. The EPA and National Fire Protection Association (NFPA) classified heptafluoropropane or HFC-227ea as acceptable for total flooding of normally occupied spaces at controlled concentration and egress times.

DuPont Fluoroproducts
Chestnut Run Plaza 702-1274-E
Wilmington, DE 19880-0702
Tel: 800-473-7790
Fax: 302 999-4727

From Asia Pacific:
DuPont Malaysia Sdn Bhd
6th Floor, Bangunan Samudra
1, Jln Kontraktor U1/14,
Hicom-Glenmarie Ind.Park,
40150, Shah Alam,
Selangor, Malaysia.
Tel: 60-3-5567 2534
Fax: 60-3- 5569 2994

DuPont China Co. Ltd.
15th Floor
Shui On Plaza
333 Huai Hai Road (Central)
Shanghai, 200021, China
Tel: 86-21-63866366
Fax: 86-21-63866333

DuPont Taiwan Limited
13F, Hung Kuo Building
167 Tun Hwa North Road
Taipei, Taiwan 105
ROC
Tel: 866-2-25144488
Fax: 886-2-25457098

DuPont Far East Inc. Phillipines
19/F GT Tower International
6815 Ayala Ave. Corner H.V. Dela Costa St.
Makati City, Phillipines
1227
Tel: 011 63 2 818 9911

From Europe, Middle East or Africa:
DuPont de Nemours International S.A.
2, chemin du Pavillion
CH-1218 Le Grand-Saconnex
Geneva, Switzerland
Tel: 41-22-717-5376
Fax: 41-22-717-6169

www.dupont.com/fire

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Because conditions of product use are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.

Copyright© 2005 DuPont or its affiliates. All rights reserved. The DuPont Oval Logo, DuPont™, The miracles of science™, Teflon®, Nomex®, Unitherm®, FE-227™, FE-36™, FE-13™ and FE-25™ are registered trademarks of DuPont or its affiliates.



The miracles of science™



The miracles of science™

DuPont™ FE-25™

Preferred Replacement for Existing Systems and The Choice for New Applications

The loss of data and archives can be devastating to a business. FE-25™ protects your information and keeps the data flowing.



Collateral damage from water or dry chemicals can be as devastating as fire and smoke. FE-25™ protects high-value assets such as sensitive computer equipment and vital data.



PROTECTING WHAT MATTERS MOST

There is no question that DuPont™ FE-25™ is the preferred clean agent replacement for construction and new applications. DuPont is committed to working with its partners in the marketplace to develop solutions that add value to the fire protection industry, improve the safety and quality of life for people around the world, and provide you with peace of mind. Our goal in fire protection, like that of our customers, is to protect people and valuable assets – it's what matters most.


A TRADITION IN SAFETY

DuPont is proud to continue its tradition of safety with FE-25™ as the preferred replacement for existing systems, new construction or new applications. With FE-25™, DuPont is the only supplier capable of providing a full range of non-ozone-depleting fire extinguishants for both new and existing systems on a global basis. Through the miracles of science, DuPont continues to reinforce its commitment to safety, environmental stewardship, and technology leadership.

FE-25™ offers the easiest, most cost-effective option to retrofit existing systems. FE-25™ requires minimal system modifications, minimizes downtime, reduces costs of conversion, is approved for use in occupied areas, has a hold time superior to alternative agents, and protects what matters most.

WHY FE-25™?

DuPont™ FE-25™ has excellent physical properties such as flow characteristics and vapor pressure. The pressure traces, vaporization, and spray patterns for FE-25™ nearly duplicate that of Halon 1301. FE-25™ has a low boiling point, and can be used and/or stored at sub-freezing temperatures. The low boiling point also leads to rapid dispersion throughout an enclosure. The improved flow of FE-25™ versus other potential alternatives allows for remote cylinder storage.

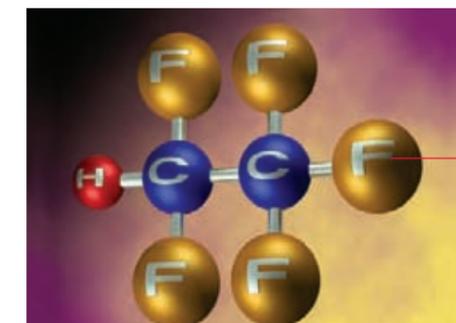

DuPont™ FE-25™ is HFC-125, pentafluoroethane.

DuPont™ FE-25™ protects people. It is suitable for use in normally occupied spaces for Class A fire hazards.



SAFE FOR PEOPLE

The EPA, NFPA and ISO have accepted and incorporated the use of a physiologically based pharmacokinetic (PBPK) model to determine allowable human exposure limits for halocarbon agents. The PBPK model provides a more accurate assessment of the length of time that a person can be exposed to a chemical. In essence, the PBPK methodology raised the allowable concentration for FE-25™ in occupied spaces from 10.0% to 11.5%. The typical design concentration for FE-25 is 8.0%, within the prescribed limits.

The PBPK model brings scientific analysis to a process that was previously incomplete to determine safe human exposure requirements. While a reliance on animal testing techniques and associated findings still exists, it is recognized that people may vary in their level of sensitivity to these types of agents. The PBPK process requires that a statistical method is run to identify safe exposure levels and egress times for humans with the highest levels of sensitivity. This process requires that highly sensitive humans are used for setting safe exposure levels. Scientific adaptation of cardiac testing from animals to humans (factoring in the most sensitive human levels to set limits) makes the PBPK model a safer mechanism to establish appropriate human exposure levels.

In total flooding applications, FE-25™ is well-suited for enclosures such as a ship's engine room to prevent a disaster at sea.



SAFE FOR ASSETS

DuPont™ FE-25™ is electrically non-conductive, non-corrosive, free of residue, has zero ozone-depletion potential (ODP) and is an environmentally preferred alternative.

As a clean agent, FE-25™ mixes thoroughly in air and does not leave behind any residue, which would cause damage or pose a post-fire clean-up problem. This means no collateral damage and minimal business interruption. DuPont™ FE-25™ is intended to protect people, high value assets, and the continuity of business.

SAFE FOR THE ENVIRONMENT

FE-25™ is an environmentally preferred alternative; it does not contain chlorine or bromine and therefore has zero ODP. FE-25™ has relatively low global warming potential (GWP) compared with other commercially available agents. Combined with its low GWP, less FE-25™ is required by weight than other alternatives, leading to a reduced environmental footprint. Overall environmental impact is also minimized by improved detection technology and extremely low discharge rates into the environment.



FE-25™ is an environmentally preferred alternative for existing and new applications. With no chlorine or bromine, FE-25™ is an ozone-friendly clean agent.

FE-25™ is particularly well-suited for sensitive applications, such as clean rooms.

DuPont™ FE-25™ ...protecting our planet and paving the way to the future.

