


HARRINGTON PERMANENT SPRINKLER STORZ™

Harrington Permanent Sprinkler Storz™ - Metal Face Storz Adapter X NPT female, secured permanently to the pipe, including Storz Blind Cap with Pressure Seal and Aircraft Cable.

Harrington, Inc.
2630 West 21st Street
Erie, PA 16506
800-553-0078

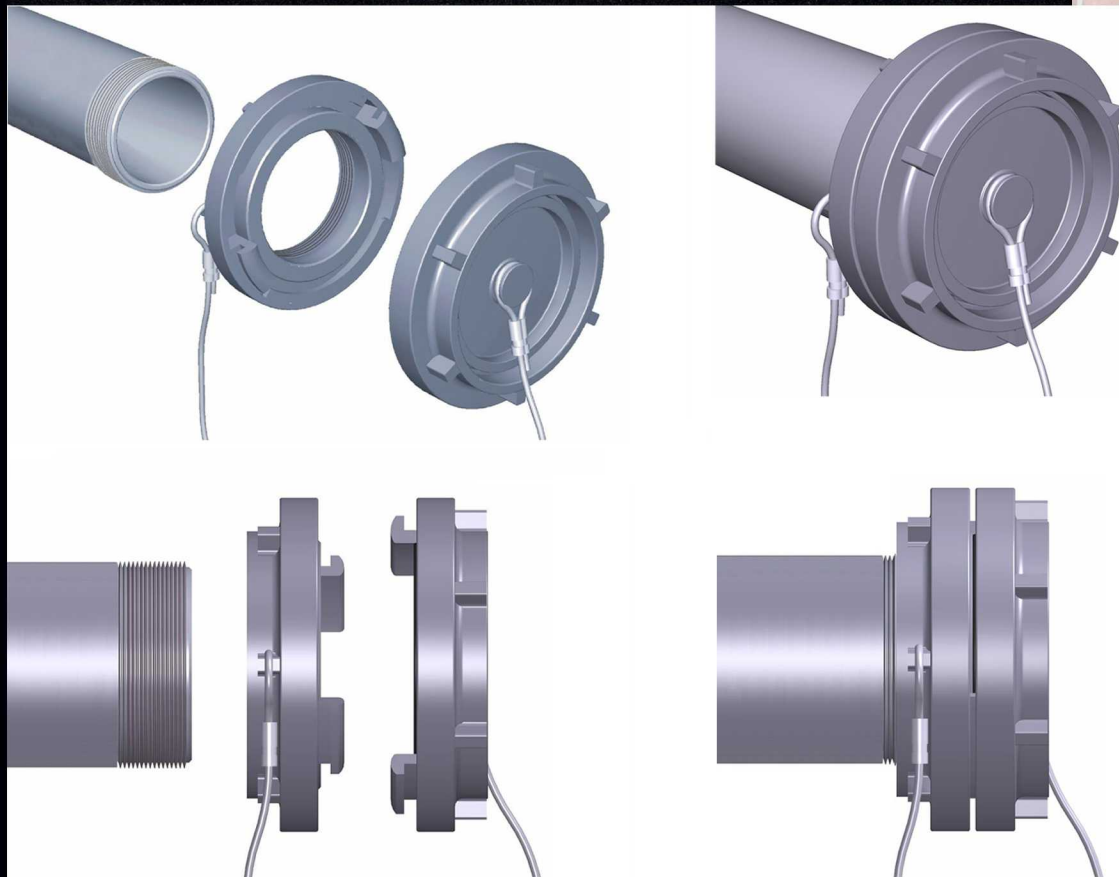

HPSS™ SPECIFICATIONS

The Permanent Sprinkler Storz threads onto the male pipe and is secured permanently to the pipe. A Storz spanner wrench is required for cap removal.

The Storz adapter shall have a hard anodized aluminum metal face seal and hard anodized aluminum Storz ramps and lugs. The adapter's finish shall be hardcoat anodized to Mil-A-8625f, Type 3, dark gray. The adapter shall be made of forged or extruded 6061-T6 aluminum and secured to the pipe by 2 stainless steel set screws, inserted 180° apart. The tapered female pipe thread, when fully installed, seals with the tapered male pipe thread.

The blind cap shall have hard anodized aluminum Storz ramps and lugs, made of forged or extruded 6061-T6 aluminum. The center cap shall be equipped with a pressure seal. The cap shall be connected to the adapter with a 0.125" vinyl coated aircraft cable. The mid torque cap requires a Storz spanner wrench for removal. Once installed, the Permanent Sprinkler Storz with cap extends less than 3" from the end of the pipe.

SPECIFY: HPSS