



Capacitive Sensors

Series 80 - PNP

Housing M 18 x 1

- Housing material: Brass
- Sensing distance 0,5...15 mm adjustable
- II 3D IP67 T101°C X
- For use in zone 22

Certificate:



QuattroEtcProtect™

Technical data

Non-flush mountable

Operating distance S_n	8 mm
Operating distance min. / max. adjustable	0,5...15 mm
Electrical version	4-wire DC
Output function	Antivalent (NO + NC)

Type NPN

Art.-No.

Connection diagram No.

Type PNP








KAS-80-A23-A-3D

Art.-No.

KA 0977

Connection diagram No.	6
Operating voltage (U_B)	10...35 V DC
Output current max. (I_o)	2 x 250 mA
Voltage drop max. (U_d)	≤ 2.0 V
Permitted residual ripple max.	10 %
No-load current (I_o)	Typ. 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 529	IP 67
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 4 x 0.34 mm ²
Housing material	Brass
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA / PPO
Media optimized	Yes

All specifications are subject to change without notice. (24.03.2010)

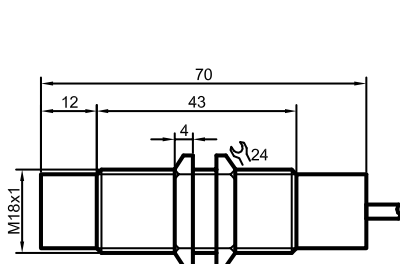

Made in Germany