

For motor vehicles  
**Xenon Double Flasher Beacon XB-35**



The **Xenon Flasher Beacon XB-35** in the proven Mini-TriOptic housing offers a small and compact design.

The user will very quickly notice the low weight of this magnetic beacon à la "Kojak". It can be used at up to 155 mph.

The **XB-35** can be quickly and easily attached without damaging the vehicle's roof.

It has very good adhesive properties and is scratch- and slip-proof.



Order numbers

**008 409 700 651**  
XB-35 BM in blue, with magnetic base

**008 409 701 651**  
XB-35 RM in red, with magnetic base

**008 409 705 651**  
XB-35 BML in blue, with magnetic base,  
LEMO-plug

**008 409 710 651**  
XB-35 BA in blue, plug-on installation

**008 409 711 651**  
XB-35 RA in red, plug-on installation

**008 409 720 651**  
XB-35 BD in blue, three-hole ISO  
assembly


**008 409 721 651**  
XB-35 RD in red, three-hole ISO  
assembly

**008 409 730 651**  
XB-35 BMA; in blue, with DIN-adaptor

**008 409 731 651**  
XB-35 RMA in red, with DIN-adaptor



088 027 971-000 (07/11 EN)

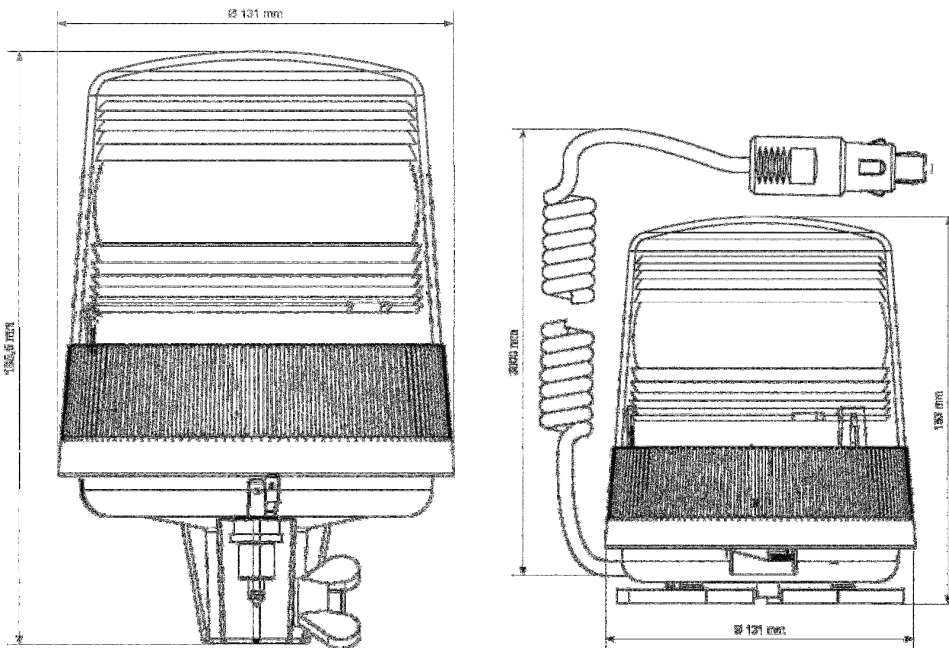

Dimensions

### Technical Data

#### Voltage Supply

- Nominal Voltage : 12 / 24 V<sub>DC</sub>
- Operating Voltage Range : 10.8 ... 28.8 V<sub>DC</sub>

Power Consumption : 2.5 A / 1.2 A (3 A / 2.5 A peak)

Flash Frequency : 2.1 Hz

Light Intensity : typical 70 cd

Protection Class : IP 56

Installation Types : magnetic installation  
 tube mounting  
 flat mounting (35 and 130 mm bolt circle)

Dome Colours : blue, red, green

Dimensions : depending on version

Weight : approx. 900 g

#### Approvals

- Light : E1 – 002253
- EMC : e1 – 029100

Technical changes reserved